NIST
National Institute of Standards and Technology
Technology Administration, U.S. Department of Commerce

RESPONSE ROBOTS

DHS/NIST Sponsored Evaluation Exercises

Pocket Guide

Version 2008.1

NIST
National Institute of Standards and Technology
Technology Administration, U.S. Department of Commerce

RESPONSE ROBOTS

DHS/NIST Sponsored Evaluation Exercises

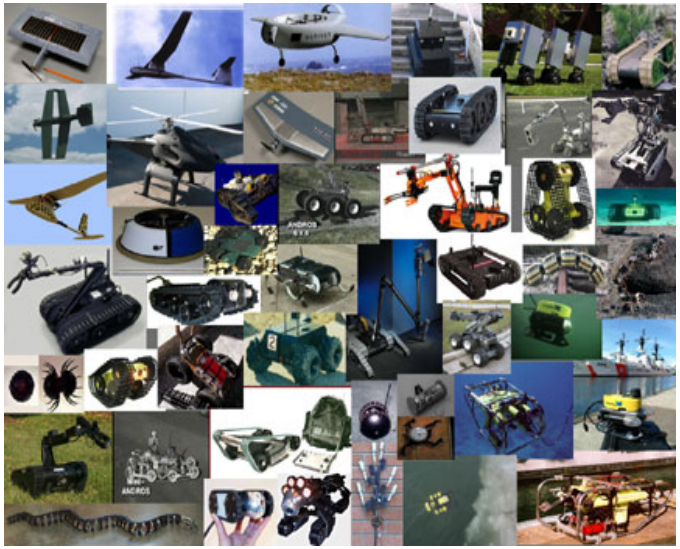

Pocket Guide

Version 2008.1

Certain commercial equipment, instruments, or materials are identified in this document. Such identification does not imply recommendation or endorsement by the National Institute of Standards and Technology, nor does it imply that the products identified are necessarily the best available for the purpose.

Certain commercial equipment, instruments, or materials are identified in this document. Such identification does not imply recommendation or endorsement by the National Institute of Standards and Technology, nor does it imply that the products identified are necessarily the best available for the purpose.

i

Contacts

Elena Messina
Program Manager
elena.messina@nist.gov
301-975-3510

Adam Jacoff
Test Director
adam.jacoff@nist.gov
301-975-4235

Ann Marie Virts
Designer/Editor
ann.virts@nist.gov
301-975-5068

Futher Information:
http://www.isd.mel.nist.gov/US&R_Robot_Standards/

Intelligent Systems Division
Manufacturing Engineering Laboratory
National Institute of Standards and Technology
100 Bureau Drive, MS8230
Gaithersburg, MD 20899

Contacts

Elena Messina
Program Manager
elena.messina@nist.gov
301-975-3510

Adam Jacoff
Test Director
adam.jacoff@nist.gov
301-975-4235

Ann Marie Virts
Designer/Editor
ann.virts@nist.gov
301-975-5068

Futher Information:
http://www.isd.mel.nist.gov/US&R_Robot_Standards/

Intelligent Systems Division
Manufacturing Engineering Laboratory
National Institute of Standards and Technology
100 Bureau Drive, MS8230
Gaithersburg, MD 20899

ii

Program Overview

Application-specific robot standards and repeatable performance testing with objective performance metrics will accelerate the development and deployment of mobile robotic tools for US&R responders, enhancing the effectiveness of these teams while reducing the risks to personnel during disaster response. Currently, no such standards or performance metrics exist.

In order to address this need, the DHS Science and Technology (S&T) Directorate initiated an effort in fiscal year 2004 with the National Institute of Standards and Technology (NIST) to develop comprehensive standards related to the development, testing, and certification of effective robotic technologies for US&R applications. These standards will address robot mobility, sensing, navigation, planning, integration into operational caches, and human factors. Such standards will allow DHS to provide guidance to local, state, and federal homeland security entities regarding the purchase, deployment, and use of robotic systems for US&R applications.

This standards development effort focuses on fostering collaboration between US&R responders, robot vendors, and robot developers to generate consensus standards for task specific robot capabilities and interoperability of components. Furthermore, the effort includes the development and administration of technology readiness level (TRL) assessment exercises. These exercises will generate statistically significant performance data for developmental and fieldable robotic systems.

Program Overview

Application-specific robot standards and repeatable performance testing with objective performance metrics will accelerate the development and deployment of mobile robotic tools for US&R responders, enhancing the effectiveness of these teams while reducing the risks to personnel during disaster response. Currently, no such standards or performance metrics exist.

In order to address this need, the DHS Science and Technology (S&T) Directorate initiated an effort in fiscal year 2004 with the National Institute of Standards and Technology (NIST) to develop comprehensive standards related to the development, testing, and certification of effective robotic technologies for US&R applications. These standards will address robot mobility, sensing, navigation, planning, integration into operational caches, and human factors. Such standards will allow DHS to provide guidance to local, state, and federal homeland security entities regarding the purchase, deployment, and use of robotic systems for US&R applications.

This standards development effort focuses on fostering collaboration between US&R responders, robot vendors, and robot developers to generate consensus standards for task specific robot capabilities and interoperability of components. Furthermore, the effort includes the development and administration of technology readiness level (TRL) assessment exercises. These exercises will generate statistically significant performance data for developmental and fieldable robotic systems.

iii

These response robot evaluation exercises for US&R teams introduce emerging robotic capabilities to emergency responders within their own training facilities, while educating robot developers regarding the necessary performance requirements and operational constraints to be effective. Emerging standard test methods and usage guides for US&R robot performance are under development within the ASTM International Committee on Homeland Security, Operational Equipment (E54.08.01). These events help refine the proposed standard test methods and fixtures/props that developers can use to practice critical capabilities and measure performance in ways that are relevant to emergency responders. These events are conducted in US&R training scenarios to help correlate the proposed standard test methods with envisioned deployment tasks and to lay the foundation for usage guides identifying a robot's applicability to particular response scenarios.

TASK FORCE PARTICIPATION

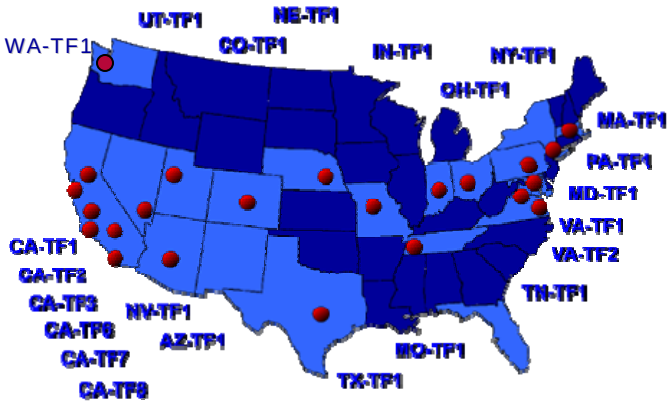

These response robot evaluation exercises for US&R teams introduce emerging robotic capabilities to emergency responders within their own training facilities, while educating robot developers regarding the necessary performance requirements and operational constraints to be effective. Emerging standard test methods and usage guides for US&R robot performance are under development within the ASTM International Committee on Homeland Security, Operational Equipment (E54.08.01). These events help refine the proposed standard test methods and fixtures/props that developers can use to practice critical capabilities and measure performance in ways that are relevant to emergency responders. These events are conducted in US&R training scenarios to help correlate the proposed standard test methods with envisioned deployment tasks and to lay the foundation for usage guides identifying a robot's applicability to particular response scenarios.

TASK FORCE PARTICIPATION

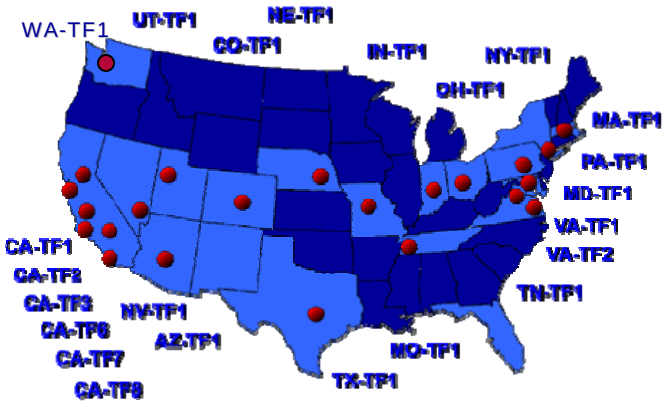

Disaster City
June 18-22, 2007

Disaster City
June 18-22, 2007

Event Introduction

The fourth in a series of DHS/NIST Response Robot Evaluation Exercises for FEMA urban search and rescue (US&R) teams is hosted at the Texas Task Force 1 (TX-TF1) training facility known as **Disaster City** located at Texas A&M University, College Station, TX. All applicable robots were invited to take part in this exercise, which will capture robot performance data within emerging standard robot test methods and operationally relevant practice scenarios. Practice scenarios feature ground robots working in confined spaces within a partially collapsed structure along with down-range reconnaissance of two train wrecks; one a hazardous materials train and the other a passenger train from an operational stand-off greater than 150m/500ft. Other practice scenarios will also be available.

The robots used in these scenarios should deploy any or all appropriate sensors such as: color cameras, two-way audio, thermal imagers, chemical sensors, 3D mapping, GPS/GIS location, and/or other useful capabilities such as payloads, manipulators, etc. General descriptions of the robots that were sought are as follows, but are not limited to:

- Ground based portable robots that can circumnavigate large unknown situations (i.e. around the train derailments).
- Highly agile, man-packable robots that can lead responders through complex environments (i.e. the buildings and rubble piles).
- Confined space accessible robots for deployment into sub-human size voids or be thrown into/over inaccessible area
- Wall climbing robots for surveillance from elevated vantage points

Event Introduction

The fourth in a series of DHS/NIST Response Robot Evaluation Exercises for FEMA urban search and rescue (US&R) teams is hosted at the Texas Task Force 1 (TX-TF1) training facility known as **Disaster City** located at Texas A&M University, College Station, TX. All applicable robots were invited to take part in this exercise, which will capture robot performance data within emerging standard robot test methods and operationally relevant practice scenarios. Practice scenarios feature ground robots working in confined spaces within a partially collapsed structure along with down-range reconnaissance of two train wrecks; one a hazardous materials train and the other a passenger train from an operational stand-off greater than 150m/500ft. Other practice scenarios will also be available.

The robots used in these scenarios should deploy any or all appropriate sensors such as: color cameras, two-way audio, thermal imagers, chemical sensors, 3D mapping, GPS/GIS location, and/or other useful capabilities such as payloads, manipulators, etc. General descriptions of the robots that were sought are as follows, but are not limited to:

- Ground based portable robots that can circumnavigate large unknown situations (i.e. around the train derailments).
- Highly agile, man-packable robots that can lead responders through complex environments (i.e. the buildings and rubble piles).
- Confined space accessible robots for deployment into sub-human size voids or be thrown into/over inaccessible area
- Wall climbing robots for surveillance from elevated vantage points

2

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Active Scope Camera	Tohoku University	59
Dragon Runner	Automatika	65
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Hero	First-Response Robotics	75
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Matilda	Mesa Robotics	91
Modular Log. Platform	Segway	97
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
RMP 200	Segway	103
RMP 400	Segway	107
TeleMax	TeleRob	111
Wall Climbers		
VMRP	Vortex	117
Aerial Robots		
AirRobot	AirRobot	129

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Active Scope Camera	Tohoku University	59
Dragon Runner	Automatika	65
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Hero	First-Response Robotics	75
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Matilda	Mesa Robotics	91
Modular Log. Platform	Segway	97
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
RMP 200	Segway	103
RMP 400	Segway	107
TeleMax	TeleRob	111
Wall Climbers		
VMRP	Vortex	117
Aerial Robots		
AirRobot	AirRobot	129

3

Site Map

Site Map

Maryland TF-1
August 19-21, 2006

Maryland TF-1
August 19-21, 2006

Event Introduction

The third in a series of response robot informal evaluation exercises for DHS/FEMA US&R teams was hosted at the Montgomery County Fire Rescue Training Academy in Rockville, Maryland (near Washington DC). This event finalized the test methods targeted for the initial (Wave 1) set of standards as well as initiated experimentation with onboard payloads, especially for Chemical, Biological, Radiological, Nuclear, and Explosive (CBRNE) sensing. Therefore, emphasis was on (a) robots that could address the deployment categories relevant to Wave 1 standards and (b) deploying CBRNE sensors on these robots. The three robot deployment categories selected by responders to be emphasized in Wave 1 are: ground peek robots that are small and throwable, ground wide-area survey robots that can traverse non-collapsed structures or areas external to the collapse, and aerial survey or loiter robots. Manufacturers of robots, purchasable and/or developmental, that can address these areas, were invited to take part in this exercise, which will highlight operationally relevant US&R scenarios.

Maryland Task Force 1 Training Facility

Event Introduction

The third in a series of response robot informal evaluation exercises for DHS/FEMA US&R teams was hosted at the Montgomery County Fire Rescue Training Academy in Rockville, Maryland (near Washington DC). This event finalized the test methods targeted for the initial (Wave 1) set of standards as well as initiated experimentation with onboard payloads, especially for Chemical, Biological, Radiological, Nuclear, and Explosive (CBRNE) sensing. Therefore, emphasis was on (a) robots that could address the deployment categories relevant to Wave 1 standards and (b) deploying CBRNE sensors on these robots. The three robot deployment categories selected by responders to be emphasized in Wave 1 are: ground peek robots that are small and throwable, ground wide-area survey robots that can traverse non-collapsed structures or areas external to the collapse, and aerial survey or loiter robots. Manufacturers of robots, purchasable and/or developmental, that can address these areas, were invited to take part in this exercise, which will highlight operationally relevant US&R scenarios.

Maryland Task Force 1 Training Facility

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Iris	Toin	57
LRV	Applied Research Assoc.	61
VGTV-Extreme	Inuktun	63
Dragon Runner	Automatika	65
BomBot	WVHTC	67
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Soryu	IRS	77
Soryu V	IRS	79
PacBot EOD	iRobot	81
PacBot Explorer	iRobot	83
Hibiscus	Toin	85
Cphea	Toin	87
Shinobi	Univer. Electro Comm.	89
Matilda	Mesa Robotics	91
ATRV mini	Idaho National Lab	95
Talon	Foster-Miller	99
Mini-Andros II	Remotec	105
Andros F6A	Remotec	109
Boz I	BOZ Robotics	113
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
AirRobot	AirRobot	129
Yamaha Heliocoper	Skeyes Unlimited	141

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Iris	Toin	57
LRV	Applied Research Assoc.	61
VGTV-Extreme	Inuktun	63
Dragon Runner	Automatika	65
BomBot	WVHTC	67
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Soryu	IRS	77
Soryu V	IRS	79
PacBot EOD	iRobot	81
PacBot Explorer	iRobot	83
Hibiscus	Toin	85
Cphea	Toin	87
Shinobi	Univer. Electro Comm.	89
Matilda	Mesa Robotics	91
ATRV mini	Idaho National Lab	95
Talon	Foster-Miller	99
Mini-Andros II	Remotec	105
Andros F6A	Remotec	109
Boz I	BOZ Robotics	113
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
AirRobot	AirRobot	129
Yamaha Heliocoper	Skeyes Unlimited	141

7

Site Overview

Site Overview

Disaster City
April 4-6, 2006

Disaster City
April 4-6, 2006

9

Event Introduction

The second in a series of response robot evaluation exercises for DHS/FEMA US&R teams was hosted at the TX-TF1 training facility known as Disaster City located at Texas A&M University, College Station, TX. All applicable robots and supporting technologies (e.g., sensors), purchasable and/or developmental, were invited to take part in this exercise, which highlighted operationally relevant US&R scenarios specifically devised for ground, aerial, and underwater response robots. Based on their experiences deploying robots within the training scenarios, responders selected three robot categories as being the focus deployment types for the development of the Wave 1 standards. These are small throw-able "peek bots;" wide-area ground survey robots; and aerial loiter/survey robots.

Event Introduction

The second in a series of response robot evaluation exercises for DHS/FEMA US&R teams was hosted at the TX-TF1 training facility known as Disaster City located at Texas A&M University, College Station, TX. All applicable robots and supporting technologies (e.g., sensors), purchasable and/or developmental, were invited to take part in this exercise, which highlighted operationally relevant US&R scenarios specifically devised for ground, aerial, and underwater response robots. Based on their experiences deploying robots within the training scenarios, responders selected three robot categories as being the focus deployment types for the development of the Wave 1 standards. These are small throw-able "peek bots;" wide-area ground survey robots; and aerial loiter/survey robots.

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
VGTV-Extreme	Inuktun	63
BomBot	WVHTC	67
Marv	Mesa Robotics	71
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Matilda	Mesa Robotics	91
Chaos	Autonomous Solutions, Inc.	93
Talon	Foster-Miller	99
Mini-Andros II	Remotec	105
Andros F6A	Remotec	109
TeleMax	TeleRob	111
PackBot Scout	iRobot	N/A
Sneaky	M-Bots	N/A
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
Nighthawk	Applied Research Assoc.	125
Dragon Eye	AeroVironment, Inc.	131
CyberBug	Cyber Defense Systems, Inc.	133
Raven	AeroVironment, Inc.	135
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Flying Bassett	Univ. of AL – Huntsville	139
Wasp	AeroVironment, Inc.	N/A
Aquatic Robots		
Pro III	VideoRay, LLC	145

Event Robots

Robot Name (by size)	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
VGTV-Extreme	Inuktun	63
BomBot	WVHTC	67
Marv	Mesa Robotics	71
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Matilda	Mesa Robotics	91
Chaos	Autonomous Solutions, Inc.	93
Talon	Foster-Miller	99
Mini-Andros II	Remotec	105
Andros F6A	Remotec	109
TeleMax	TeleRob	111
PackBot Scout	iRobot	N/A
Sneaky	M-Bots	N/A
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
Nighthawk	Applied Research Assoc.	125
Dragon Eye	AeroVironment, Inc.	131
CyberBug	Cyber Defense Systems, Inc.	133
Raven	AeroVironment, Inc.	135
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Flying Bassett	Univ. of AL – Huntsville	139
Wasp	AeroVironment, Inc.	N/A
Aquatic Robots		
Pro III	VideoRay, LLC	145

11

Site Map

Site Map

13

Safety	16
Test Methods	18
Ground Robots	52
Wall Climbers	116
Aerial Robots	122
Aquatic Robots	144
Sensors	148

Safety	16
Test Methods	18
Ground Robots	52
Wall Climbers	116
Aerial Robots	122
Aquatic Robots	144
Sensors	148

14

15

Safety

Safety

Safety of all personnel participating in this event is our first concern. The fact that we have robotics personnel generally unaccustomed to working within the hazardous environments at these US&R training sites is particularly problematic. Having emergency responders generally unaccustomed to working with robots is also a concern. Please follow these simple guidelines:

• Appropriate personal protective equipment (PPE) must be worn at all times while on site (see associated page on PPE). Compliance with PPE rules are mandatory.

• Rubble piles and other difficult scenarios present the most risk to novices. If your robot needs to be extracted, please ask your associated emergency responder to retrieve it.

• Always maintain awareness of others working within your scenario and communicate your intentions *before* doing whatever you have in mind.

• Robots can do unpredictable things; the bigger/heavier the robot the more space you should allow it when operating. Always verify that the robot is powered off before interacting with it. Never stick your fingers into wheels, tracks, manipulator pinch points, etc. while the robot is powered on. Remotely teleoperated robots may be the most dangerous because the remote operator may not know you decided to perform on-the-spot maintenance! Always familiarize yourself with the EMERGENCY STOP procedures first -- and last -- before interacting with or operating robots. Some implementations are more predictable than others.

• If you see anything you consider unsafe in our environment, please inform the Test Director or any emergency responder on site, and let's discuss it at the daily after action briefing to be sure every potential hazard is addressed.

• **Everybody on site is a safety officer!**

Safety

Safety

Safety of all personnel participating in this event is our first concern. The fact that we have robotics personnel generally unaccustomed to working within the hazardous environments at these US&R training sites is particularly problematic. Having emergency responders generally unaccustomed to working with robots is also a concern. Please follow these simple guidelines:

• Appropriate personal protective equipment (PPE) must be worn at all times while on site (see associated page on PPE). Compliance with PPE rules are mandatory.

• Rubble piles and other difficult scenarios present the most risk to novices. If your robot needs to be extracted, please ask your associated emergency responder to retrieve it.

• Always maintain awareness of others working within your scenario and communicate your intentions *before* doing whatever you have in mind.

• Robots can do unpredictable things; the bigger/heavier the robot the more space you should allow it when operating. Always verify that the robot is powered off before interacting with it. Never stick your fingers into wheels, tracks, manipulator pinch points, etc. while the robot is powered on. Remotely teleoperated robots may be the most dangerous because the remote operator may not know you decided to perform on-the-spot maintenance! Always familiarize yourself with the EMERGENCY STOP procedures first -- and last -- before interacting with or operating robots. Some implementations are more predictable than others.

• If you see anything you consider unsafe in our environment, please inform the Test Director or any emergency responder on site, and let's discuss it at the daily after action briefing to be sure every potential hazard is addressed.

• **Everybody on site is a safety officer!**

16

Personal Protective Equipment

Personal protective equipment (PPE) is required for working within any US&R scenario at the site. People in street clothes or without helmets/gloves/etc as shown below are limited to paved roads only. If you are working within a scenario, you must wear ALL the equipment shown below. Compliance with these personal protective equipment rules are mandatory - it is standard practice for US&R environments.

- **Helmet**
  Hard hats are okay. We have some to borrow or you can purchase at www.thefirestore.com for $75 and up.
- **Ear protection**
  We'll supply these.
- **Eye protection**
  Sunglasses are okay.
- **Long sleeve shirt**
- **Work gloves**
- **Long pants**
  Army surplus stores sell typical BDU and EMT pants.
- **Boots**
  Preferably steel toe.

Additional protective padding for knees and elbows is optional, but good for rubble piles.

Personal Protective Equipment

Personal protective equipment (PPE) is required for working within any US&R scenario at the site. People in street clothes or without helmets/gloves/etc as shown below are limited to paved roads only. If you are working within a scenario, you must wear ALL the equipment shown below. Compliance with these personal protective equipment rules are mandatory - it is standard practice for US&R environments.

- **Helmet**
  Hard hats are okay. We have some to borrow or you can purchase at www.thefirestore.com for $75 and up.
- **Ear protection**
  We'll supply these.
- **Eye protection**
  Sunglasses are okay.
- **Long sleeve shirt**
- **Work gloves**
- **Long pants**
  Army surplus stores sell typical BDU and EMT pants.
- **Boots**
  Preferably steel toe.

Additional protective padding for knees and elbows is optional, but good for rubble piles.

17

Test Methods

Test Methods

Test Methods

Test Methods

Cache Packaging, Weight, Setup, Tools

Requirements (Metric):

- Logistics: Cache Packaging: Volume (#pelicans: #hardiggs: #ropacks: #pallets)
- Logistics: Cache Packaging: Weight (kilograms)
- Logistics: Cache Packaging: Setup Time (minutes)
- Logistics: Cache Packaging: Transportation Restrictions (yes:no)
- Logistics: Field Maintenance: Spares and Supplies (percent of robot weight)
- Logistics: Field Maintenance: Tools (none:typical:special)
- Human-System Interaction: Portability (kilograms)
- Power: Voltage Compatibility With Cache (yes:no)

Cache Packaging, Weight, Setup, Tools

Requirements (Metric):

- Logistics: Cache Packaging: Volume (#pelicans: #hardiggs: #ropacks: #pallets)
- Logistics: Cache Packaging: Weight (kilograms)
- Logistics: Cache Packaging: Setup Time (minutes)
- Logistics: Cache Packaging: Transportation Restrictions (yes:no)
- Logistics: Field Maintenance: Spares and Supplies (percent of robot weight)
- Logistics: Field Maintenance: Tools (none:typical:special)
- Human-System Interaction: Portability (kilograms)
- Power: Voltage Compatibility With Cache (yes:no)

19

Test Method:

- Quantify logistics requirements for system to remain operational for 72 hours without re-supply, and on site for 10 day deployment
- Count qualified containers containing all system components and supplies
- Measure shipping weight and deployed robot weight
- Measure set-up time from unpacking to deployment down-range
- Identify tools required for setup and field maintenance
- Check list or choose appropriate selection from a specifically defined scale for each requirement

Test Methods

Test Method:

- Quantify logistics requirements for system to remain operational for 72 hours without re-supply, and on site for 10 day deployment
- Count qualified containers containing all system components and supplies
- Measure shipping weight and deployed robot weight
- Measure set-up time from unpacking to deployment down-range
- Identify tools required for setup and field maintenance
- Check list or choose appropriate selection from a specifically defined scale for each requirement

20

Confined Space

(ZIG-ZAG or FIGURE-8)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)

Confined Space

(ZIG-ZAG or FIGURE-8)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)

21

Test Method:

- Measure the operator's ability to remotely traverse/negotiate a confined space passage while operating the robot through the operator interface and communications link.
- Random stepfield pallets (full cubic) provide complex flooring and ceiling obstacles.
- Adjustable posts heights provide diminishing void space for increased difficulty.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely traverse/negotiate a confined space passage while operating the robot through the operator interface and communications link.
- Random stepfield pallets (full cubic) provide complex flooring and ceiling obstacles.
- Adjustable posts heights provide diminishing void space for increased difficulty.
- Test in ambient light and dark environments, radio and tether communications separately.

22

Directed Perception

Requirements (Metric):

- Payload: Manipulation: Sensor Manipulation (yes:no, holes/level)
- Payload: Manipulation: Max Reach (centimeters , holes/level)
- Chassis: Illumination: Variable (yes:no)
- Sensing: Real-time Color Video: Near Field Acuity (smallest chart line)
- Sensing: Remote Temperature (yes:no)
- Sensing: Audio: Two-way (volume control:listen always-push to talk:stereo:direction indicator)
- Sensing: Hazmat Detection (PH+O_2,LEL,CO, H_2S,RAD : plus WMD and TIC detection/classification : plus Tentative WMD and TIC identification : plus WMD and TIC sampling)
- Human-System Interaction: Initial Training (hours)
- Human-System Interaction: Proficiency Education (hours/year)
- Human-System Interaction: Acceptable Usability (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Auto Notification (yes:no)
- Human-System Interaction: Assistive: Path Tracing (yes:no)

Directed Perception

Requirements (Metric):

- Payload: Manipulation: Sensor Manipulation (yes:no, holes/level)
- Payload: Manipulation: Max Reach (centimeters , holes/level)
- Chassis: Illumination: Variable (yes:no)
- Sensing: Real-time Color Video: Near Field Acuity (smallest chart line)
- Sensing: Remote Temperature (yes:no)
- Sensing: Audio: Two-way (volume control:listen always-push to talk:stereo:direction indicator)
- Sensing: Hazmat Detection (PH+O_2,LEL,CO, H_2S,RAD : plus WMD and TIC detection/classification : plus Tentative WMD and TIC identification : plus WMD and TIC sampling)
- Human-System Interaction: Initial Training (hours)
- Human-System Interaction: Proficiency Education (hours/year)
- Human-System Interaction: Acceptable Usability (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Auto Notification (yes:no)
- Human-System Interaction: Assistive: Path Tracing (yes:no)

23

Test Method:

- Measure the operator's ability to remotely position sensors near holes in box stacks to identify assorted targets placed inside while operating the robot through the operator interface and communications link.
- Box stacks surround the robot on thee sides (front, left, right) with holes on facing and top surfaces. Each level is tested sequentially up to four levels high (72 inch / 180 cm). Holes are offset from the centerline robot position.
- Visual targets inside the holes require positioning a camera with adjustable illumination into two different horizontal viewing angles at each level to read visual acuity charts (0° directly through the hole) and hazmat labels (approximately 25° inward toward the centerline).
- Other targets/sensors can be used including chemical, radiological, explosive, thermal, etc. which also allow first detection measurements.
- Various terrain pallets to increase difficulty include flat floor, pitch ramp, roll ramp, and random stepfields.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely position sensors near holes in box stacks to identify assorted targets placed inside while operating the robot through the operator interface and communications link.
- Box stacks surround the robot on thee sides (front, left, right) with holes on facing and top surfaces. Each level is tested sequentially up to four levels high (72 inch / 180 cm). Holes are offset from the centerline robot position.
- Visual targets inside the holes require positioning a camera with adjustable illumination into two different horizontal viewing angles at each level to read visual acuity charts (0° directly through the hole) and hazmat labels (approximately 25° inward toward the centerline).
- Other targets/sensors can be used including chemical, radiological, explosive, thermal, etc. which also allow first detection measurements.
- Various terrain pallets to increase difficulty include flat floor, pitch ramp, roll ramp, and random stepfields.
- Test in ambient light and dark environments, radio and tether communications separately.

24

Grasping Dexterity

Requirements (Metric):

- Payload: Manipulation: Sensor Manipulation
  (yes:no, blocks/level)
- Payload: Manipulation: Max Reach
  (centimeters, blocks/level)
- Payload: Delivery
  (kilograms at max reach, blocks/level)
- Payload: Retrieval
  (centimeters at max reach, blocks/level)
- Payload: Emplacement
  (yes:no, blocks/level)

Grasping Dexterity

Requirements (Metric):

- Payload: Manipulation: Sensor Manipulation
  (yes:no, blocks/level)
- Payload: Manipulation: Max Reach
  (centimeters, blocks/level)
- Payload: Delivery
  (kilograms at max reach, blocks/level)
- Payload: Retrieval
  (centimeters at max reach, blocks/level)
- Payload: Emplacement
  (yes:no, blocks/level)

Test Method:

- Measure the operator's ability to remotely grasp and place blocks onto shelf stacks with three different access approaches while operating the robot through the operator interface and communications link.
- Shelf stacks surround the robot on thee sides (front, left, right) with nine objects placed in designated quadrants of one given surface. All surfaces have nine quadrants clearly marked.
- Objects placed on any given test level must be grasped and placed onto the remaining stacks at that level, requiring three different access approaches (open, under, over). Each object should be placed in the correlating quadrant of each stack. Each level is tested sequentially up to four levels high (72 in / 180 cm).
- Other objects can be used including simulated pipe bombs, water bottles with shock tube, communications devices, emplaced sensors, etc..
- Various terrain pallets including flat flooring, pitch ramp, roll ramp, and random stepfields increase difficulty.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely grasp and place blocks onto shelf stacks with three different access approaches while operating the robot through the operator interface and communications link.
- Shelf stacks surround the robot on thee sides (front, left, right) with nine objects placed in designated quadrants of one given surface. All surfaces have nine quadrants clearly marked.
- Objects placed on any given test level must be grasped and placed onto the remaining stacks at that level, requiring three different access approaches (open, under, over). Each object should be placed in the correlating quadrant of each stack. Each level is tested sequentially up to four levels high (72 in / 180 cm).
- Other objects can be used including simulated pipe bombs, water bottles with shock tube, communications devices, emplaced sensors, etc..
- Various terrain pallets including flat flooring, pitch ramp, roll ramp, and random stepfields increase difficulty.
- Test in ambient light and dark environments, radio and tether communications separately.

26

Human Systems Interactions

Requirements (Metric):

- Human-System Interaction: Operator Ratio (operators/robot)
- Human-System Interaction: Context: Protective Clothing (yes:no)
- Human-System Interaction: Context: Lighting Conditions (dark:daylight:glare)
- Human-System Interaction: Context: Mobility (stationary:portable:mobile)
- Human-System Interaction: Context: Operator Disengagement (yes:no)
- Human-System Interaction: Context: Co-Located Information Sharing (yes:no)
- Human-System Interaction: Context: Remote Information Sharing (meters)
- Human-System Interaction: Display: Dashboard (yes:no)
- Human-System Interaction: Display: Mission Data Integration (yes:no)
- Human-System Interaction: Interaction: Component Controls (yes:no, diagnostics)
- Human-System Interaction: Interaction: Adjustable Noise Filtering (yes:no)

Human Systems Interactions

Requirements (Metric):

- Human-System Interaction: Operator Ratio (operators/robot)
- Human-System Interaction: Context: Protective Clothing (yes:no)
- Human-System Interaction: Context: Lighting Conditions (dark:daylight:glare)
- Human-System Interaction: Context: Mobility (stationary:portable:mobile)
- Human-System Interaction: Context: Operator Disengagement (yes:no)
- Human-System Interaction: Context: Co-Located Information Sharing (yes:no)
- Human-System Interaction: Context: Remote Information Sharing (meters)
- Human-System Interaction: Display: Dashboard (yes:no)
- Human-System Interaction: Display: Mission Data Integration (yes:no)
- Human-System Interaction: Interaction: Component Controls (yes:no, diagnostics)
- Human-System Interaction: Interaction: Adjustable Noise Filtering (yes:no)

27

Requirements (Metric) Continued:

- Human-System Interaction: Assistive: Unattended Sampling (yes:no)
- Human-System Interaction: Assistive: Auto Notification (yes:no)
- Human-System Interaction: Assistive: Path Tracing (yes:no)
- Human-System Interaction: Assistive: Re-acquire Communications (yes:no)
- Human-System Interaction: Assistive: Station Keeping (# of axes)
- Human-System Interaction: Assistive: Self Extraction
- (yes:no)
- Human-System Interaction: Assistive: Emergency Stop (yes:no)
- Sensing: Real-time Color Video: Pan/Tilt Orientation Indicator (yes:no)

Test Method:

- Identify assorted operational features demonstrated during setup, practice, and/or testing.
- Check list or choose appropriate selection from a specifically defined scale for each requirement.

Test Methods

Requirements (Metric) Continued:

- Human-System Interaction: Assistive: Unattended Sampling (yes:no)
- Human-System Interaction: Assistive: Auto Notification (yes:no)
- Human-System Interaction: Assistive: Path Tracing (yes:no)
- Human-System Interaction: Assistive: Re-acquire Communications (yes:no)
- Human-System Interaction: Assistive: Station Keeping (# of axes)
- Human-System Interaction: Assistive: Self Extraction
- (yes:no)
- Human-System Interaction: Assistive: Emergency Stop (yes:no)
- Sensing: Real-time Color Video: Pan/Tilt Orientation Indicator (yes:no)

Test Method:

- Identify assorted operational features demonstrated during setup, practice, and/or testing.
- Check list or choose appropriate selection from a specifically defined scale for each requirement.

28

Inclined Plane

(WALL CLIMBING and INVERTED OPERATIONS)





Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Soft (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Firm (kilometers/hour)
- Mobility: Tumble Recovery Within Terrain Type (none: self-righting: invertible continuous operations)

Inclined Plane

(WALL CLIMBING and INVERTED OPERATIONS)





Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Soft (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Firm (kilometers/hour)
- Mobility: Tumble Recovery Within Terrain Type (none: self-righting: invertible continuous operations)

Test Method:

- Measure the operator's ability to remotely traverse an inclined/vertical/inverted plane while operating the robot through the operator interface and communications link.
- A pattern of goal positions on the plane provide prescribed straight line paths to traverse including directly ascending, directly descending, diagonal and cross incline paths.
- The incline can be adjusted from 20° - 80° for ground robots, 90° for wall climbing robots, or 100° to 180° for robots capable of inverted operations.
- The incline can be covered in a variety of surfaces (including random stepfields), but is initially simple oriented strand board (OSB)
- Test in ambient light and dark environments, radio and tether communications separately

Test Methods

Test Method:

- Measure the operator's ability to remotely traverse an inclined/vertical/inverted plane while operating the robot through the operator interface and communications link.
- A pattern of goal positions on the plane provide prescribed straight line paths to traverse including directly ascending, directly descending, diagonal and cross incline paths.
- The incline can be adjusted from 20° - 80° for ground robots, 90° for wall climbing robots, or 100° to 180° for robots capable of inverted operations.
- The incline can be covered in a variety of surfaces (including random stepfields), but is initially simple oriented strand board (OSB)
- Test in ambient light and dark environments, radio and tether communications separately

30

Mobility/Endurance

(ZIG-ZAG or FIGURE 8)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Soft (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Firm (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Locomotion: Endurance - Soft (hours)
- Mobility: Locomotion: Endurance - Firm (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)
- Power: Working Time (single charge)
- (1 hour: 4 hours: 12 hours)
- Logistics: Field Maintenance: Intervals (12hours:24hours:72hours:10days)
- Logistics: Field Maintenance: Duration (minutes)
- Logistics: Shock Resistance: (drop test, vibration test)
- Logistics: Mean Time Before Failure (hours)

Mobility/Endurance

(ZIG-ZAG or FIGURE 8)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Soft (kilometers/hour)
- Mobility: Locomotion: Sustained Speed - Firm (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Locomotion: Endurance - Soft (hours)
- Mobility: Locomotion: Endurance - Firm (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)
- Power: Working Time (single charge)
- (1 hour: 4 hours: 12 hours)
- Logistics: Field Maintenance: Intervals (12hours:24hours:72hours:10days)
- Logistics: Field Maintenance: Duration (minutes)
- Logistics: Shock Resistance: (drop test, vibration test)
- Logistics: Mean Time Before Failure (hours)

31

Test Method:

- Measure the operator's ability to remotely traverse/negotiate various terrain types within a fixed course to show mobility or endurance while operating the robot through the operator interface and communications link.
- Walls define the courses in the "Mobility/Endurance" test methods.
- Various repeatable terrain pallets can be used including flat floors, pitch ramps, roll ramps, and random stepfields to increase difficulty. Other terrains can be used including gravel, tarmac, snow, etc.
- Endurance testing can include logistics requirements for failures and repairs.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely traverse/negotiate various terrain types within a fixed course to show mobility or endurance while operating the robot through the operator interface and communications link.
- Walls define the courses in the "Mobility/Endurance" test methods.
- Various repeatable terrain pallets can be used including flat floors, pitch ramps, roll ramps, and random stepfields to increase difficulty. Other terrains can be used including gravel, tarmac, snow, etc.
- Endurance testing can include logistics requirements for failures and repairs.
- Test in ambient light and dark environments, radio and tether communications separately.

32

Other Operational Features

Requirements (Metric):

- Chassis: Tether Point
  (yes:no)
- Chassis: System Component Interoperability
  (yes:no)
- Power: Run Time Indicator
  (yes:no)
- Power: Dwell Time
  (12 hours: 24 hours: 72 hours: 10 days)
- Sensing: Internal: Orientation Reporting
  (# of axis)
- Sensing: Structural: Void Detection
  (yes:no)
- Sensing: Structural: Range Finder
  (yes:no)
- Sensing: Victim Indicators: Thermal Imaging
  (industry:military:US&R needs such as leaks, fire, etc)
- Sensing: Victim Indicators: Seismic
  (yes:no)

Other Operational Features

Requirements (Metric):

- Chassis: Tether Point
  (yes:no)
- Chassis: System Component Interoperability
  (yes:no)
- Power: Run Time Indicator
  (yes:no)
- Power: Dwell Time
  (12 hours: 24 hours: 72 hours: 10 days)
- Sensing: Internal: Orientation Reporting
  (# of axis)
- Sensing: Structural: Void Detection
  (yes:no)
- Sensing: Structural: Range Finder
  (yes:no)
- Sensing: Victim Indicators: Thermal Imaging
  (industry:military:US&R needs such as leaks, fire, etc)
- Sensing: Victim Indicators: Seismic
  (yes:no)

33

Requirements (Metric) Continued:

- Passive Data Logging Offboard: System Health (yes:no)
- Passive Data Logging Offboard: Location (yes:no)
- Passive Data Logging Offboard: Hazmat (yes:no)
- Passive Data Logging Offboard: Victim Indicators (yes:no)
- Passive Data Logging Offboard: Video (yes:no)
- Passive Data Logging Onboard: System Health (yes:no)
- Passive Data Logging Onboard: Location (yes:no)
- Passive Data Logging Onboard: Hazmat (yes:no)
- Passive Data Logging Onboard: Victim Indicators (yes:no)
- Passive Data Logging Onboard: Video (yes:no)

Test Method:

- Identify assorted operational features demonstrated during setup, practice, and/or testing.
- Check list or choose appropriate selection from a specifically defined scale for each requirement.

Test Methods

Requirements (Metric) Continued:

- Passive Data Logging Offboard: System Health (yes:no)
- Passive Data Logging Offboard: Location (yes:no)
- Passive Data Logging Offboard: Hazmat (yes:no)
- Passive Data Logging Offboard: Victim Indicators (yes:no)
- Passive Data Logging Offboard: Video (yes:no)
- Passive Data Logging Onboard: System Health (yes:no)
- Passive Data Logging Onboard: Location (yes:no)
- Passive Data Logging Onboard: Hazmat (yes:no)
- Passive Data Logging Onboard: Victim Indicators (yes:no)
- Passive Data Logging Onboard: Video (yes:no)

Test Method:

- Identify assorted operational features demonstrated during setup, practice, and/or testing.
- Check list or choose appropriate selection from a specifically defined scale for each requirement.

34

Radio Communications

(LINE OF SIGHT, BEYOND LINE OF SIGHT)

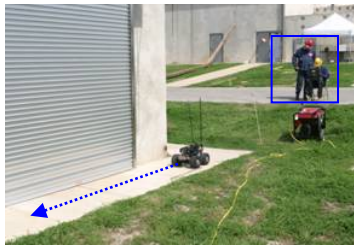



Requirements (Metric):

- Communications: Range: Line of Sight (meters)
- Communications: Range: Beyond Line of Sight (meters)
- Communications: Security (shielded from jamming and interference in none:commands:data and commands)
- Communications: Data Logging: Status and Notes (yes:no)

Radio Communications

(LINE OF SIGHT, BEYOND LINE OF SIGHT)

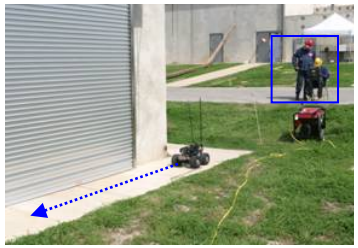



Requirements (Metric):

- Communications: Range: Line of Sight (meters)
- Communications: Range: Beyond Line of Sight (meters)
- Communications: Security (shielded from jamming and interference in none:commands:data and commands)
- Communications: Data Logging: Status and Notes (yes:no)

Test Method:

- Measure the operator's ability to remotely control the robot down-range while operating the robot through the operator interface and radio communications link.
- Line of Sight: Read visual acuity and hazmat label targets straight down-range to demonstrate control and data communications channels are functional.
- Beyond Line of Sight: At the end of the line of sight test, turn 90° around the corner of an appropriately large building. Maintain the robot within 1.2 meters along the building's wall and read near field visual acuity charts and hazmat labels at equally spaced intervals from the corner until command or data communications fail.

Test Methods

Test Method:

- Measure the operator's ability to remotely control the robot down-range while operating the robot through the operator interface and radio communications link.
- Line of Sight: Read visual acuity and hazmat label targets straight down-range to demonstrate control and data communications channels are functional.
- Beyond Line of Sight: At the end of the line of sight test, turn 90° around the corner of an appropriately large building. Maintain the robot within 1.2 meters along the building's wall and read near field visual acuity charts and hazmat labels at equally spaced intervals from the corner until command or data communications fail.

36

Random Maze

Requirements (Metric):

- Human-System Interaction: Initial Training (hours)
- Human-System Interaction: Proficiency Education (hours/year)
- Human-System Interaction: Acceptable Usability (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Path Tracing (yes:no)
- Sensing: Location: Absolute (topological from start : plus mapping onto floor plans : plus 3D GIS map)
- Sensing: Location: Relative Accuracy (meters)
- Sensing: Location: Absolute Accuracy (meters)
- Sensing: Mapping: Spatial Modeling (yes:no)
- Sensing: Mapping: Waypoint Annotation (manual : manual and automatic : fully automatic and integrated)
- Sensing: Mapping: Operator Annotations (yes:no)
- Sensing: Mapping: Equipment Setup Time (minutes)

Random Maze

Requirements (Metric):

- Human-System Interaction: Initial Training (hours)
- Human-System Interaction: Proficiency Education (hours/year)
- Human-System Interaction: Acceptable Usability (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Path Tracing (yes:no)
- Sensing: Location: Absolute (topological from start : plus mapping onto floor plans : plus 3D GIS map)
- Sensing: Location: Relative Accuracy (meters)
- Sensing: Location: Absolute Accuracy (meters)
- Sensing: Mapping: Spatial Modeling (yes:no)
- Sensing: Mapping: Waypoint Annotation (manual : manual and automatic : fully automatic and integrated)
- Sensing: Mapping: Operator Annotations (yes:no)
- Sensing: Mapping: Equipment Setup Time (minutes)

37

Test Method:

- Measure the operator's ability to remotely traverse/negotiate a random maze of hallways and rooms while operating the robot through the operator interface and communications link.
- Walls define the random maze of 1.2 meter wide hallways.
- Various repeatable terrain pallets can be used including flat floors, pitch ramps, roll ramps, and random stepfields to increase difficulty. Other terrains can be used including gravel, tarmac, snow, etc.
- Mission goals can be to simply find a path end to end, find a path end to end with target identifications along the way, right hand wall following techniques, completeness of search space, etc.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely traverse/negotiate a random maze of hallways and rooms while operating the robot through the operator interface and communications link.
- Walls define the random maze of 1.2 meter wide hallways.
- Various repeatable terrain pallets can be used including flat floors, pitch ramps, roll ramps, and random stepfields to increase difficulty. Other terrains can be used including gravel, tarmac, snow, etc.
- Mission goals can be to simply find a path end to end, find a path end to end with target identifications along the way, right hand wall following techniques, completeness of search space, etc.
- Test in ambient light and dark environments, radio and tether communications separately.

38

Stairs

(ASCENDING AND DESCENDING)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)

Stairs

(ASCENDING AND DESCENDING)

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed - Obstacles (kilometers/hour)
- Mobility: Locomotion: Endurance - Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none:self-righting:invertible continuous operations)

Test Method:

- Measure the operator's ability to remotely control the robot to ascend and descent stairs while operating the robot through the operator interface and radio communications link.

Test Methods

Test Method:

- Measure the operator's ability to remotely control the robot to ascend and descent stairs while operating the robot through the operator interface and radio communications link.

40

Station Keeping (Aerial)



Requirements (Metric):

- Mobility: Aerial: Station Keeping
  (# of axis)
- Mobility: Aerial: Area of Coverage
  (square kilometers/hour)
- Human-System Interaction: Initial Training
  (hours)
- Human-System Interaction: Proficiency Education
  (hours/year)
- Human-System Interaction: Acceptable Usability
  (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Auto Notification
  (yes:no)
- Human-System Interaction: Assistive: Path Tracing
  (yes:no)

Station Keeping (Aerial)



Requirements (Metric):

- Mobility: Aerial: Station Keeping
  (# of axis)
- Mobility: Aerial: Area of Coverage
  (square kilometers/hour)
- Human-System Interaction: Initial Training
  (hours)
- Human-System Interaction: Proficiency Education
  (hours/year)
- Human-System Interaction: Acceptable Usability
  (effectiveness, percent of targets)
- Human-System Interaction: Assistive: Auto Notification
  (yes:no)
- Human-System Interaction: Assistive: Path Tracing
  (yes:no)

Test Method:

- Measure the operator's ability to remotely control the robot to look in each window of a building while operating the robot through the operator interface and radio communications link.
- Visual acuity charts and hazmat labels are positioned inside the windows, some flush mounted and others recessed inside, to give the operator some tasks to perform.
- Prescribed paths from window to window are performed without direct line of sight from the operator to the robot.
- Test in ambient light and dark environments, radio and tether (if available) communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely control the robot to look in each window of a building while operating the robot through the operator interface and radio communications link.
- Visual acuity charts and hazmat labels are positioned inside the windows, some flush mounted and others recessed inside, to give the operator some tasks to perform.
- Prescribed paths from window to window are performed without direct line of sight from the operator to the robot.
- Test in ambient light and dark environments, radio and tether (if available) communications separately.

42

Step/Gap

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed – Obstacles (km/hr)
- Mobility: Locomotion: Endurance – Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none: self-righting: invertible continuous operations)

Step/Gap

Requirements (Metric):

- Mobility: Locomotion: Sustained Speed – Obstacles (km/hr)
- Mobility: Locomotion: Endurance – Obstacles (hours)
- Mobility: Tumble Recovery Within Terrain Type (none: self-righting: invertible continuous operations)

43

Test Method:

- Measure the operator's ability to remotely control the robot to traverse gaps of incremental lengths between pallets, ascend and descend incremental stacks of pallets both with square edges and with pipe diameters equal to the pallet step heights, while operating the robot through the operator interface and communications link (tested separately if radio and tether are available).

Test Methods

Test Method:

- Measure the operator's ability to remotely control the robot to traverse gaps of incremental lengths between pallets, ascend and descend incremental stacks of pallets both with square edges and with pipe diameters equal to the pallet step heights, while operating the robot through the operator interface and communications link (tested separately if radio and tether are available).

44

Visual Acuity

(WITH VARIABLE ILLUMINATION)



Requirements (Metric):

- Sensing: Real-time Color Video: Far Field Acuity (smallest chart line)
- Sensing: Real-time Color Video: Near Field Acuity (smallest chart line)
- Sensing: Real-time Color Video: Field of View (degrees)
- Sensing: Real-time Color Video: Pan (degrees)
- Sensing: Real-time Color Video: Tilt (degrees)
- Sensing: Real-time Color Video: Pan/Tilt Rate (degrees/second)
- Sensing: Real-time Color Video: Pan/Tilt Orientation Indicator (yes:no)
- Chassis: Illumination: Adjustable (yes:no)

Visual Acuity

(WITH VARIABLE ILLUMINATION)



Requirements (Metric):

- Sensing: Real-time Color Video: Far Field Acuity (smallest chart line)
- Sensing: Real-time Color Video: Near Field Acuity (smallest chart line)
- Sensing: Real-time Color Video: Field of View (degrees)
- Sensing: Real-time Color Video: Pan (degrees)
- Sensing: Real-time Color Video: Tilt (degrees)
- Sensing: Real-time Color Video: Pan/Tilt Rate (degrees/second)
- Sensing: Real-time Color Video: Pan/Tilt Orientation Indicator (yes:no)
- Chassis: Illumination: Adjustable (yes:no)

45

Test Method:

- Measure the operator's ability to remotely read standard visual acuity charts, both near field and far field, while operating the robot through the operator interface and communications link.
- Measure each camera's field of view, pan, tilt, and associated rates.
- Identify functionality of pan/tilt indicator on operator interface.
- Test in ambient light and dark environments, radio and tether communications separately.

Test Methods

Test Method:

- Measure the operator's ability to remotely read standard visual acuity charts, both near field and far field, while operating the robot through the operator interface and communications link.
- Measure each camera's field of view, pan, tilt, and associated rates.
- Identify functionality of pan/tilt indicator on operator interface.
- Test in ambient light and dark environments, radio and tether communications separately.

46

Props:
Repeatable Terrain

Random Stepfield Pallets:

- Levels of difficulty:
  - Half-cubic stepfield pallets (orange) provide repeatable surface topologies for orientation complexity in static tests such as “Directed Perception” or “Grasping Dexterity.”
  - Full-cubic stepfield pallets (red) provide repeatable surface topologies for test methods such as “Confined Space” and “Mobility/Endurance.”
- Scaleable sizes:
  - Small-size robots use pallets made of 2x2 posts (5 cm x 5 cm)
  - Mid-size robots use pallets made of 4x4 posts (10 cm x 10 cm) (shown)
  - Large-size robots use pallets made of clusters of (4) 4x4 posts (10 cm x 10 cm)
- Assorted topologies:
  - Random flat pallets
  - Random hill pallets
  - Random diagonal hill pallets

Props:
Repeatable Terrain

Random Stepfield Pallets:

- Levels of difficulty:
  - Half-cubic stepfield pallets (orange) provide repeatable surface topologies for orientation complexity in static tests such as “Directed Perception” or “Grasping Dexterity.”
  - Full-cubic stepfield pallets (red) provide repeatable surface topologies for test methods such as “Confined Space” and “Mobility/Endurance.”
- Scaleable sizes:
  - Small-size robots use pallets made of 2x2 posts (5 cm x 5 cm)
  - Mid-size robots use pallets made of 4x4 posts (10 cm x 10 cm) (shown)
  - Large-size robots use pallets made of clusters of (4) 4x4 posts (10 cm x 10 cm)
- Assorted topologies:
  - Random flat pallets
  - Random hill pallets
  - Random diagonal hill pallets

47

Test Methods

Pitch/roll Ramps:

- 5°, 10°, and 15° pitch and roll ramps provide non-flat flooring for orientation complexity within test methods such as “Directed Perception,” “Grasping Dexterity,” “Random Maze,” or “Mobility/Endurance.”

Test Methods

Pitch/roll Ramps:

- 5°, 10°, and 15° pitch and roll ramps provide non-flat flooring for orientation complexity within test methods such as “Directed Perception,” “Grasping Dexterity,” “Random Maze,” or “Mobility/Endurance.”

48

Props:
Targets And Objects

Visual Acuity Charts:

- Far-field and near-field charts provide easy to recognize “tumbling E’s” with standard metrics to measure an operator’s ability to discern details in the video image when viewed remotely through the operator interface and communications link. These charts are used in test methods such as “Directed Perception,” “Radio Communications,” “Random Maze,” “Station Keeping,” and “Visual Acuity.”

Hazmat Labels:

- Various hazmat labels provide operationally significant targets in the environment to identify colors, shapes, icons, numbers and letters, which relate directly back to the visual acuity charts. Hazmat labels are used in test methods such as “Directed Perception,” “Radio Communications,” “Random Maze,” “Station Keeping,” and “Visual Acuity.”

Props:
Targets And Objects

Visual Acuity Charts:

- Far-field and near-field charts provide easy to recognize “tumbling E’s” with standard metrics to measure an operator’s ability to discern details in the video image when viewed remotely through the operator interface and communications link. These charts are used in test methods such as “Directed Perception,” “Radio Communications,” “Random Maze,” “Station Keeping,” and “Visual Acuity.”

Hazmat Labels:

- Various hazmat labels provide operationally significant targets in the environment to identify colors, shapes, icons, numbers and letters, which relate directly back to the visual acuity charts. Hazmat labels are used in test methods such as “Directed Perception,” “Radio Communications,” “Random Maze,” “Station Keeping,” and “Visual Acuity.”

49

Test Methods

Wood Blocks:

- Simple wood blocks of two different lengths (one short enough to grasp from any direction, one long enough to require a vertical grasp for most grippers) are used in the “Grasping Dexterity” test method to provide abstract but repeatable grasping tasks that emphasize manipulator dexterity.

Others:

- Simulated pipe bombs and mineral water bottles with shock tube detonators provide operationally recognizable shapes and weights for use in test methods such as “Directed Perception” or “Grasping Dexterity” or “Random Maze.”
- Thermal heating pads and trace sources of chemical, radiological, and explosive samples are also used in test methods such as“Directed Perception” and the “Random Maze.”

Test Methods

Wood Blocks:

- Simple wood blocks of two different lengths (one short enough to grasp from any direction, one long enough to require a vertical grasp for most grippers) are used in the “Grasping Dexterity” test method to provide abstract but repeatable grasping tasks that emphasize manipulator dexterity.

Others:

- Simulated pipe bombs and mineral water bottles with shock tube detonators provide operationally recognizable shapes and weights for use in test methods such as “Directed Perception” or “Grasping Dexterity” or “Random Maze.”
- Thermal heating pads and trace sources of chemical, radiological, and explosive samples are also used in test methods such as“Directed Perception” and the “Random Maze.”

50

51

Ground Robots

Ground Robots

Ground Robots

Ground Robots

52

EyeBall R1

Remington Tech. Div.
www.remingtonTD.com
301-208-8686/Pat Moore

Manufacturer's Specs:

- Circumference 3.25" (8.25 cm)
- Weight: 1.25 lbs (.566kg)
- Turning Diam: 0"
- Max Speed: rotates 4 RPM
- Power Source: battery
- Endurance: 3 hours
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: camera
- Payload: N/A
- Manipulator: N/A

Radio Tx:	2400 MHz, 902-928MHz (RF)
Radio Rx:	2400 MHz, 902-928MHz (RF)

EyeBall R1

Remington Tech. Div.
www.remingtonTD.com
301-208-8686/Pat Moore

Manufacturer's Specs:

- Circumference 3.25" (8.25 cm)
- Weight: 1.25 lbs (.566kg)
- Turning Diam: 0"
- Max Speed: rotates 4 RPM
- Power Source: battery
- Endurance: 3 hours
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: camera
- Payload: N/A
- Manipulator: N/A

Radio Tx:	2400 MHz, 902-928MHz (RF)
Radio Rx:	2400 MHz, 902-928MHz (RF)

53

EyeBall R1

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

EyeBall R1

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

54

ToughBot

Omnitech Robotics International LLC
www.omnitech.com
303-922-7773/Dave Parish

Manufacturer's Specs:

- Width: 3.14" (8 cm)
- Length: 4.3" (11 cm)
- Height: 4.3" (11 cm)
- Weight: 2 lb (.9 kg)
- Turning Diam: 0"
- Max Speed: TBD
- Power Source: battery
- Endurance: 1 hour
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: 2 camera (wide and narrow)
- Payload: N/A
- Manipulator: N/A

Radio Tx:	2400 MHz, 868MHz
Radio Rx:	2400 MHz, 868MHz

ToughBot

Omnitech Robotics International LLC
www.omnitech.com
303-922-7773/Dave Parish

Manufacturer's Specs:

- Width: 3.14" (8 cm)
- Length: 4.3" (11 cm)
- Height: 4.3" (11 cm)
- Weight: 2 lb (.9 kg)
- Turning Diam: 0"
- Max Speed: TBD
- Power Source: battery
- Endurance: 1 hour
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: 2 camera (wide and narrow)
- Payload: N/A
- Manipulator: N/A

Radio Tx:	2400 MHz, 868MHz
Radio Rx:	2400 MHz, 868MHz

55

ToughBot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

ToughBot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

56

Iris

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org

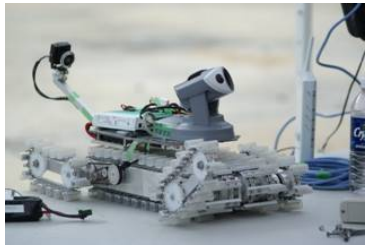

Manufacturer's Specs:

- Width:
- Length:
- Height:
- Weight:
- Turning Dia:
- Max Speed:
- Power Source:
- Endurance:
- Tether:
- Control:
- Sensors:
- Payload:
- Manipulator:

Specifications Unavailable

Radio TX:
Radio RX:

Iris

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org

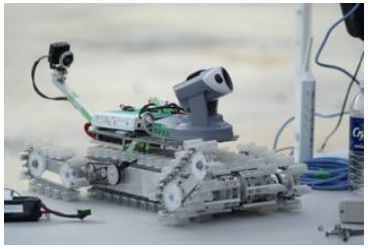

Manufacturer's Specs:

- Width:
- Length:
- Height:
- Weight:
- Turning Dia:
- Max Speed:
- Power Source:
- Endurance:
- Tether:
- Control:
- Sensors:
- Payload:
- Manipulator:

Specifications Unavailable

Radio TX:
Radio RX:

57

Iris

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Iris

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

58

Active Scope Camera

Tohoku University, Tadokoro Laboratory
www.rm.is.tohoku.ac.jp

Manufacturer's Specs:

- Width: 1" (2.5cm)
- Length: 320" (80 cm)
- Height: 1" (2.5 cm)
- Weight: 10 lbs (5 kg)
- Turning Dia: 4" – 80" (10cm – 200 cm)
- Max Speed: .2 fps (6 cmps)
- Power Source: battery
- Endurance: 60 min
- Tether: body is the tether
- Control: teleop
- Sensors: CCD camera
- Payload: N/A
- Manipulator: N/A

Radio TX: Tethered
Radio RX:

Active Scope Camera

Tohoku University, Tadokoro Laboratory
www.rm.is.tohoku.ac.jp

Manufacturer's Specs:

- Width: 1" (2.5cm)
- Length: 320" (80 cm)
- Height: 1" (2.5 cm)
- Weight: 10 lbs (5 kg)
- Turning Dia: 4" – 80" (10cm – 200 cm)
- Max Speed: .2 fps (6 cmps)
- Power Source: battery
- Endurance: 60 min
- Tether: body is the tether
- Control: teleop
- Sensors: CCD camera
- Payload: N/A
- Manipulator: N/A

Radio TX: Tethered
Radio RX:

59

Active Scope Camera

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Active Scope Camera

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

60

LRV

Applied Research Associates
www.ARA.com
303-795-8106/Andrew Poulter

Manufacturer's Specs:

- Width: 20" (51 cm)
- Length: 14" (36 cm)
- Height: 6.5" (16 cm)
- Weight: 14 lbs (6.3 kg)
- Turning Diam: 20" (51 cm)
- Max Speed: 6 fps (1.8 mps)
- Power Source: 8.5 AH Lithium Polymer
- Endurance: 60-240 min
- Tether: Option
- Control: Remote tele-operation
- Sensors: Color / IR Cameras
- Payload: 1.2 lb(0.5 kg) , drag 20 lb (9 kg)
- Manipulator: N/A –future option, existing boom reach is 18 in (45 cm

Radio Tx: 75MHz(75mW), 900 MHz(100mW),2400MHz(200mW)
Radio Rx: 75 MHz , 900 MHz , 2400 MHz

LRV

Applied Research Associates
www.ARA.com
303-795-8106/Andrew Poulter

Manufacturer's Specs:

- Width: 20" (51 cm)
- Length: 14" (36 cm)
- Height: 6.5" (16 cm)
- Weight: 14 lbs (6.3 kg)
- Turning Diam: 20" (51 cm)
- Max Speed: 6 fps (1.8 mps)
- Power Source: 8.5 AH Lithium Polymer
- Endurance: 60-240 min
- Tether: Option
- Control: Remote tele-operation
- Sensors: Color / IR Cameras
- Payload: 1.2 lb(0.5 kg) , drag 20 lb (9 kg)
- Manipulator: N/A –future option, existing boom reach is 18 in (45 cm

Radio Tx: 75MHz(75mW), 900 MHz(100mW),2400MHz(200mW)
Radio Rx: 75 MHz , 900 MHz , 2400 MHz

61

LRV

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

LRV

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

62

VGTV-Extreme

Inuktun
www.inuktun.com/
1-877-468-5886/ Derek Naughton

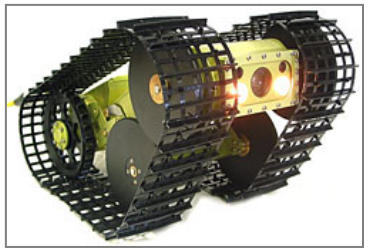

Manufacturer's Specs:

- Width: 10.9" (27.7 cm)
- Length: 16.8" (42.7 cm)
- Height: 5.5" (14 cm) Lowered
- Weight: 14-20lbs(6.2-9.1kg)
- Turning Diam: 0" (0 cm)
- Max Speed: 1.5 fps (.45 mps)
- Power Source: lithium ion battery
- Endurance: >360 min
- Tether: power, comms
- Control: eyes-on, remote teleop
- Sensors: tilt camera 300º
- Payload: 10 lb (4.5 kg)
- Manipulator: N/A

Radio Tx: (tether only)
Radio Rx: (tether only)

VGTV-Extreme

Inuktun
www.inuktun.com/
1-877-468-5886/ Derek Naughton

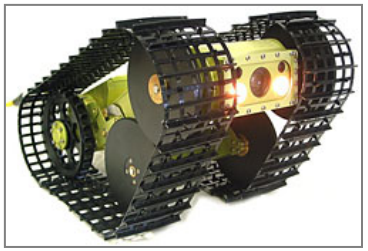

Manufacturer's Specs:

- Width: 10.9" (27.7 cm)
- Length: 16.8" (42.7 cm)
- Height: 5.5" (14 cm) Lowered
- Weight: 14-20lbs(6.2-9.1kg)
- Turning Diam: 0" (0 cm)
- Max Speed: 1.5 fps (.45 mps)
- Power Source: lithium ion battery
- Endurance: >360 min
- Tether: power, comms
- Control: eyes-on, remote teleop
- Sensors: tilt camera 300º
- Payload: 10 lb (4.5 kg)
- Manipulator: N/A

Radio Tx: (tether only)
Radio Rx: (tether only)

63

VGTV-Extreme

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

VGTV-Extreme

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

64

Dragon Runner

Automatika, Inc.
www.automatika.com
412-968-1022 /William Crowley

Manufacturer's Specs:

- Width: 12.2" (31 cm)
- Length: 16.6" (42 cm)
- Height: 6" (15.2 cm)
- Weight: 14 lbs (6.4 kg)
- Turning Diam: Zero-Turn; Swept
- Max Speed: 7.5 - 29 fps (5 - 20 mph)
- Power Source: battery (NimH baseline)
- Endurance: 45 min @ 13 mph on flat ground
- Tether: none
- Control: remote teleop, loss-of-comms back-tracking, cruise-control
- Sensors: thermal (PIR), acoustic, visual (wide-angle FF lens; IR illuminator)
- Payload: 10 lb (4.5 kg)
- Manipulator: TBD

Radio Tx: Low S-Band MHz(1 – 1k mW)L-Band MHz (1–1K mW)
Radio Rx: n/a

Dragon Runner

Automatika, Inc.
www.automatika.com
412-968-1022 /William Crowley

Manufacturer's Specs:

- Width: 12.2" (31 cm)
- Length: 16.6" (42 cm)
- Height: 6" (15.2 cm)
- Weight: 14 lbs (6.4 kg)
- Turning Diam: Zero-Turn; Swept
- Max Speed: 7.5 - 29 fps (5 - 20 mph)
- Power Source: battery (NimH baseline)
- Endurance: 45 min @ 13 mph on flat ground
- Tether: none
- Control: remote teleop, loss-of-comms back-tracking, cruise-control
- Sensors: thermal (PIR), acoustic, visual (wide-angle FF lens; IR illuminator)
- Payload: 10 lb (4.5 kg)
- Manipulator: TBD

Radio Tx: Low S-Band MHz(1 – 1k mW)L-Band MHz (1–1K mW)
Radio Rx: n/a

65

Dragon Runner

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Dragon Runner

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

66

BomBot

WVHTC Foundation
www.wvhtf.org
304-368-4518/Carey Bulter

Manufacturer's Specs:

- Width: 18" (45.72 cm)
- Length: 20" (50.8 cm)
- Height: 32" (81.28 cm)
- Weight: 15 lbs (6.8kg)
- Turning Diam: 2ft. (60.96 cm)
- Max Speed: 20 mph (32 km/hr)
- Power Source: battery
- Endurance: 3-4 hrs.
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: none
- Payload: 10 lbs (4.5kg)
- Manipulator: N/A

Radio Tx: 2400 MHz
Radio Rx: 2400 MHz

BomBot

WVHTC Foundation
www.wvhtf.org
304-368-4518/Carey Bulter

Manufacturer's Specs:

- Width: 18" (45.72 cm)
- Length: 20" (50.8 cm)
- Height: 32" (81.28 cm)
- Weight: 15 lbs (6.8kg)
- Turning Diam: 2ft. (60.96 cm)
- Max Speed: 20 mph (32 km/hr)
- Power Source: battery
- Endurance: 3-4 hrs.
- Tether: none
- Control: eyes-on, remote teleop
- Sensors: none
- Payload: 10 lbs (4.5kg)
- Manipulator: N/A

Radio Tx: 2400 MHz
Radio Rx: 2400 MHz

67

BomBot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

BomBot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

68

BomBot 2

WVHTC Foundation
www.wvhtf.org
304-368-4518/Carey Bulter

Manufacturer's Specs:

- Width: 19.5" (49.5 cm)
- Length: 22.8" (57.8 cm)
- Height: 10"- 23" (25.4 -58.4 cm)
- Weight: 30 lbs (13.6 kg)
- Turning Diam: 110 in (280 cm)
- Max Speed: 14.6 fps (4.5 mps)
- Power Source: 24VDC BB2590 or BB390 battery (2 vehicle, 1 OCU); 1.5V AA (4 in OCU)
- Endurance: 180 mins
- Tether: none
- Control: Remote teleoperation, line-of-sight
- Sensors: (modular Wide-angle surveillance camera mission plate to adapt sensors)
- Payload: lbs 45 lbs (20.4 kg) on mission plate, 60 (27.2 kg) towed (optional wagon)
- Manipulator: N/A

Radio TX: 2390 MHz (CH6) /1000 mW (video), 2440 to 2480 MHz /100 mW (commands)

BomBot 2

WVHTC Foundation
www.wvhtf.org
304-368-4518/Carey Bulter

Manufacturer's Specs:

- Width: 19.5" (49.5 cm)
- Length: 22.8" (57.8 cm)
- Height: 10"- 23" (25.4 -58.4 cm)
- Weight: 30 lbs (13.6 kg)
- Turning Diam: 110 in (280 cm)
- Max Speed: 14.6 fps (4.5 mps)
- Power Source: 24VDC BB2590 or BB390 battery (2 vehicle, 1 OCU); 1.5V AA (4 in OCU)
- Endurance: 180 mins
- Tether: none
- Control: Remote teleoperation, line-of-sight
- Sensors: (modular Wide-angle surveillance camera mission plate to adapt sensors)
- Payload: lbs 45 lbs (20.4 kg) on mission plate, 60 (27.2 kg) towed (optional wagon)
- Manipulator: N/A

Radio TX: 2390 MHz (CH6) /1000 mW (video), 2440 to 2480 MHz /100 mW (commands)

69

BomBot 2

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

BomBot 2

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

70

Marv

Mesa Robotics, Inc.
www.mesa-robotics.com
256-464-7252/Mike Cole

Manufacturer's Specs:

- Width: 13.5" (34.29 cm)
- Length: 20.5" (52.07 cm)
- Height: 12" (30.48 cm)
- Weight: 25 lbs (11.33 kg)
- Turning Dia: zero in
- Max Speed: 4 mph (6.4 km/hr)
- Power Source: 12VDC, NiMH battery
- Endurance: 60 – 120 min
- Tether: none
- Control: remote teleop
- Sensors: future option
- Payload: 10 lbs (4.5 kg)
- Manipulator: future option

Radio TX: 900 MHz control, 2400 MHz video
Radio RX: 900 MHz control, 2400 MHz video

Marv

Mesa Robotics, Inc.
www.mesa-robotics.com
256-464-7252/Mike Cole

Manufacturer's Specs:

- Width: 13.5" (34.29 cm)
- Length: 20.5" (52.07 cm)
- Height: 12" (30.48 cm)
- Weight: 25 lbs (11.33 kg)
- Turning Dia: zero in
- Max Speed: 4 mph (6.4 km/hr)
- Power Source: 12VDC, NiMH battery
- Endurance: 60 – 120 min
- Tether: none
- Control: remote teleop
- Sensors: future option
- Payload: 10 lbs (4.5 kg)
- Manipulator: future option

Radio TX: 900 MHz control, 2400 MHz video
Radio RX: 900 MHz control, 2400 MHz video

Marv

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Marv

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

72

Negotiator Tactical Surveillance Robot

Robotic FX, Inc.
www.RoboticFX.com
708-448-4264/Eric Webber

Manufacturer's Specs:

- Width: 16" - 22" (40.6-55.9 cm)
- Length: 25"(63.5 cm)
- Height: 7.6 in (19.3 cm)
- Weight: 25-35 lbs (11.3 -15.9 kg)
- Turning Diam: Turns in place
- Max Speed: 4.4-7.3 fps (1.3-2.2 mps)
- Power Source: battery (NiMH)
- Endurance: 180 to 360 min
- Tether (optional): comms
- Control: remote teleop, telemetry
- Sensors: All sensors (open system)
- Payload: Up Stairs = 10 lb (4.5 kg) / Flat Ground = 75 lb (34 kg)
- Manipulator: 6 DoFs, reach 42 in (106 cm)

Radio TX: Data 900 MHz / Video 2400MHz / (Opt.)Digital Video 300MHz UHF
Radio RX: Data 900 MHz / Video 2400MHz / (Opt.) Digital Video 300MHz UHF

Negotiator Tactical Surveillance Robot

Robotic FX, Inc.
www.RoboticFX.com
708-448-4264/Eric Webber

Manufacturer's Specs:

- Width: 16" - 22" (40.6-55.9 cm)
- Length: 25"(63.5 cm)
- Height: 7.6 in (19.3 cm)
- Weight: 25-35 lbs (11.3 -15.9 kg)
- Turning Diam: Turns in place
- Max Speed: 4.4-7.3 fps (1.3-2.2 mps)
- Power Source: battery (NiMH)
- Endurance: 180 to 360 min
- Tether (optional): comms
- Control: remote teleop, telemetry
- Sensors: All sensors (open system)
- Payload: Up Stairs = 10 lb (4.5 kg) / Flat Ground = 75 lb (34 kg)
- Manipulator: 6 DoFs, reach 42 in (106 cm)

Radio TX: Data 900 MHz / Video 2400MHz / (Opt.)Digital Video 300MHz UHF
Radio RX: Data 900 MHz / Video 2400MHz / (Opt.) Digital Video 300MHz UHF

Negotiator Tactical Surveillance Robot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Negotiator Tactical Surveillance Robot

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

74

HERO

First-Response Robotics, LLC
www.FirstResponseRobotics.com
513-752-6653 /Mike Cardarelli



Manufacturer's Specs:

- Width: 21" (53 cm)
- Length: 36" (91 cm)
- Height: 17" (43 cm)
- Weight: 42 lbs (19 kg)
- Turning Diam: 0 m (0 cm)
- Max Speed: 10 fps (3 mps)
- Power Source: battery
- Endurance: 45 min
- Tether: none
- Control: remote teleop
- Sensors: radiation, biological
- Payload: 130 lb (59 kg)
- Manipulator: none

Radio TX: 72 MHz controller/1.0W (video), 2.4 MHz
900 MHz/0.5 W (telemetry), 1.2 MHz / 3W (video)

HERO

First-Response Robotics, LLC
www.FirstResponseRobotics.com
513-752-6653 /Mike Cardarelli



Manufacturer's Specs:

- Width: 21" (53 cm)
- Length: 36" (91 cm)
- Height: 17" (43 cm)
- Weight: 42 lbs (19 kg)
- Turning Diam: 0 m (0 cm)
- Max Speed: 10 fps (3 mps)
- Power Source: battery
- Endurance: 45 min
- Tether: none
- Control: remote teleop
- Sensors: radiation, biological
- Payload: 130 lb (59 kg)
- Manipulator: none

Radio TX: 72 MHz controller/1.0W (video), 2.4 MHz
900 MHz/0.5 W (telemetry), 1.2 MHz / 3W (video)

75

Hero

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Hero

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

76

Soryu

International Rescue System Institute
www.rescuesystem.org
Shigeo Hirose

Manufacturer's Specs:

- Width: 5.9" (15 cm)
- Length: 47.2" (120 cm)
- Height: 5.1" (13 cm)
- Weight: 28.6 lbs (13 kg)
- Turning Diam: 1.0 m
- Max Speed: 0.3 mps
- Power Source: battery
- Endurance: 20 min
- Tether: comms
- Control: remote teleop
- Sensors: thermal, camera, GAS(CO, O2, SO, CH)
- Payload: none
- Manipulator: none

Radio Tx: (tether only)
Radio Rx: (tether only)

Soryu

International Rescue System Institute
www.rescuesystem.org
Shigeo Hirose

Manufacturer's Specs:

- Width: 5.9" (15 cm)
- Length: 47.2" (120 cm)
- Height: 5.1" (13 cm)
- Weight: 28.6 lbs (13 kg)
- Turning Diam: 1.0 m
- Max Speed: 0.3 mps
- Power Source: battery
- Endurance: 20 min
- Tether: comms
- Control: remote teleop
- Sensors: thermal, camera, GAS(CO, O2, SO, CH)
- Payload: none
- Manipulator: none

Radio Tx: (tether only)
Radio Rx: (tether only)

77

Soryu

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Soryu

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

78

Soryu V

International Rescue System Institute
www.rescuesystem.org
Shigeo Hirose

Manufacturer's Specs:

- Width: 7.9" (20.2 cm)
- Length: 45.6" – 54.3" (116 - 138 cm)
- Height: 5.7" (14.5 cm)
- Weight: 37.47 lbs (17 kg)
- Turning Diam: 50.3" (128 cm)
- Max Speed: 0.25 mps
- Power Source: battery (14.4V, 7400mAh)
- Endurance: 40 min
- Tether: comms
- Control: remote teleop
- Sensors: Camera
- Payload: unknown
- Manipulator: none

Radio Tx: (tether only)
Radio Rx: (tether only)

Soryu V

International Rescue System Institute
www.rescuesystem.org
Shigeo Hirose

Manufacturer's Specs:

- Width: 7.9" (20.2 cm)
- Length: 45.6" – 54.3" (116 - 138 cm)
- Height: 5.7" (14.5 cm)
- Weight: 37.47 lbs (17 kg)
- Turning Diam: 50.3" (128 cm)
- Max Speed: 0.25 mps
- Power Source: battery (14.4V, 7400mAh)
- Endurance: 40 min
- Tether: comms
- Control: remote teleop
- Sensors: Camera
- Payload: unknown
- Manipulator: none

Radio Tx: (tether only)
Radio Rx: (tether only)

79

Soryu V

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Soryu V

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

80

PackBot EOD

iRobot
www.irobot.com
781-345-0200/Jeff Ostazewski

Manufacturer's Specs:

- Width: 16"- 20" (40 - 50 cm)
- Length: 27" (69 cm)
- Height: 7.5" (19 cm)
- Weight: 48 lbs (22 kg)
- Turning Dia: 34" (86.36 cm)
- Max Speed: Variable 0 - 5 mph (0 - 8 km/hr)
- Power Source: battery
- Endurance: 2-12 hours / 6+ mi (10+ km)
- Tether: optional
- Control: Teleop
- Sensors: Zoom, FLIR cameras,omni direct mic
- Payload: 8 additional
- Manipulator: arm

Radio TX: 2400 MHz
Radio RX: 2400 MHz

PackBot EOD

iRobot
www.irobot.com
781-345-0200/Jeff Ostazewski

Manufacturer's Specs:

- Width: 16"- 20" (40 - 50 cm)
- Length: 27" (69 cm)
- Height: 7.5" (19 cm)
- Weight: 48 lbs (22 kg)
- Turning Dia: 34" (86.36 cm)
- Max Speed: Variable 0 - 5 mph (0 - 8 km/hr)
- Power Source: battery
- Endurance: 2-12 hours / 6+ mi (10+ km)
- Tether: optional
- Control: Teleop
- Sensors: Zoom, FLIR cameras,omni direct mic
- Payload: 8 additional
- Manipulator: arm

Radio TX: 2400 MHz
Radio RX: 2400 MHz

PackBot EOD

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____

Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

PackBot EOD

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____

Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

82

PackBot Explorer

iRobot
www.irobot.com
781-345-0200/Jeff Ostazewski

Manufacturer's Specs:

- Width: 16" - 20" (40 - 50 cm)
- Length: 27"(69 cm)
- Height: 7.5" (19 cm)
- Weight: 48 lbs (22 kg)
- Turning Dia: 34" (86.36 cm)
- Max Speed: Variable 0 - 5 mph (0 - 8 km/hr)
- Power Source: battery
- Endurance: 2-12 hours / 6+ mi (10+ km)
- Tether: optional
- Control: Teleop
- Sensors: Zoom & FLIR cameras, omni dirc mic
- Payload: Supports up to 8
- Manipulator: surveillance head is mounted on a 12" (.3m) mast with a 360° pan and 270° tilt

Radio TX: 2400 MHz
Radio RX: 2400 MHz

PackBot Explorer

iRobot
www.irobot.com
781-345-0200/Jeff Ostazewski

Manufacturer's Specs:

- Width: 16" - 20" (40 - 50 cm)
- Length: 27"(69 cm)
- Height: 7.5" (19 cm)
- Weight: 48 lbs (22 kg)
- Turning Dia: 34" (86.36 cm)
- Max Speed: Variable 0 - 5 mph (0 - 8 km/hr)
- Power Source: battery
- Endurance: 2-12 hours / 6+ mi (10+ km)
- Tether: optional
- Control: Teleop
- Sensors: Zoom & FLIR cameras, omni dirc mic
- Payload: Supports up to 8
- Manipulator: surveillance head is mounted on a 12" (.3m) mast with a 360° pan and 270° tilt

Radio TX: 2400 MHz
Radio RX: 2400 MHz

PackBot Explorer

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

PackBot Explorer

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

84

Hibiscus

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org




Manufacturer's Specs:

- Width: 14.5" (37 cm)
- Length: 38.5" (98 cm)
- Height: 7" (18 cm)
- Weight: 49.6 lbs (22.5 kg)
- Turn Diam: diagonal for skid steer
- Max Speed: .7 mph (1.2 km/ph)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control Features: diagnostics, wall following, centering
- Sensors: URG,Heat, Voice
- Payload: none
- Manipulator: Sensor arm 4DOF: Length: 14.1" (36cm)

Radio TX: 2400 MHz
Radio RX: 2400 MHz

Hibiscus

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org




Manufacturer's Specs:

- Width: 14.5" (37 cm)
- Length: 38.5" (98 cm)
- Height: 7" (18 cm)
- Weight: 49.6 lbs (22.5 kg)
- Turn Diam: diagonal for skid steer
- Max Speed: .7 mph (1.2 km/ph)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control Features: diagnostics, wall following, centering
- Sensors: URG,Heat, Voice
- Payload: none
- Manipulator: Sensor arm 4DOF: Length: 14.1" (36cm)

Radio TX: 2400 MHz
Radio RX: 2400 MHz

85

Hibiscus

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Hibiscus

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

86

Cphea

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org



Manufacturer's Specs:

- Width: 20" (52 cm)
- Length: 40" (102 cm)
- Height: 9.4" (24 cm)
- Weight: 49.6 lbs (22.5 kg)
- Turn Diam: diagonal for skid steer
- Max Speed: .37 mph (0.6 km/ph)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control: diagnostics, wall following, centering
- Sensors: URG,Heat, Voice
- Payload: none
- Manipulator: Sensor arm 2DOF: Length (30cm)

Radio TX: 2400 MHz
Radio RX: 2400 MHz

Cphea

Toin University of Yokohama
Chiba Institute of Technology
koyanagi@furo.org



Manufacturer's Specs:

- Width: 20" (52 cm)
- Length: 40" (102 cm)
- Height: 9.4" (24 cm)
- Weight: 49.6 lbs (22.5 kg)
- Turn Diam: diagonal for skid steer
- Max Speed: .37 mph (0.6 km/ph)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control: diagnostics, wall following, centering
- Sensors: URG,Heat, Voice
- Payload: none
- Manipulator: Sensor arm 2DOF: Length (30cm)

Radio TX: 2400 MHz
Radio RX: 2400 MHz

87

Cphea

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Cphea

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

88

Shinobi

Univ Electo-Communications

www.hi.mce.uec.ac.jp/matsuno-lab/matsuno_eng.html

Noritaka Sato

Manufacturer's Specs:

- Width: 15. 74" (40 cm)
- Length: 31.49" (80 cm)
- Height: 15-74" – 31.49" (40cm- 80cm)
- Weight: 57.32 lbs (26 kg)
- Turning Dia: 0
- Max Speed: .21 mps (.33 kms)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control: teleop
- Sensors: thermal , chemical (cO2)
- Payload: none
- Manipulator: none

Radio TX: 5200 MhZ (10mW)
Radio RX: 5200 MhZ (10mW)

Shinobi

Univ Electo-Communications

www.hi.mce.uec.ac.jp/matsuno-lab/matsuno_eng.html

Noritaka Sato

Manufacturer's Specs:

- Width: 15. 74" (40 cm)
- Length: 31.49" (80 cm)
- Height: 15-74" – 31.49" (40cm- 80cm)
- Weight: 57.32 lbs (26 kg)
- Turning Dia: 0
- Max Speed: .21 mps (.33 kms)
- Power Source: battery
- Endurance: 60 min
- Tether: none
- Control: teleop
- Sensors: thermal , chemical (cO2)
- Payload: none
- Manipulator: none

Radio TX: 5200 MhZ (10mW)
Radio RX: 5200 MhZ (10mW)

Shinobi

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Shinobi

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

90

Matilda

Mesa Robotics, Inc.
www.mesa-robotics.com
256-464-7252/Mike Cole

Manufacturer's Specs:

- Width: 21" (53.34 cm)
- Length: 30" – 34" (76.2cm- 86.36cm)
- Height: 12" (30.48 cm)
- Weight: 61 lbs (27.66 kg)
- Turning Dia: zero
- Max Speed: 2.0 mph
- Power Source: 12VCD battery, NiMH
- Endurance: 360 – 480 min
- Tether: fiber optic cable (data,video, audio)
- Control: remote teleop
- Sensors: biological, chemical, radiological
- Payload: 125 lbs
- Manipulator: 5 DOF with 44 in reach (adds 45lbs/20.4kg to weight)

Radio TX: 900 MHz control, 1800 MHz video, 469 MHz audio
Radio RX: 900 MHz control, 1800 MHz video, 469 MHz audio

Matilda

Mesa Robotics, Inc.
www.mesa-robotics.com
256-464-7252/Mike Cole

Manufacturer's Specs:

- Width: 21" (53.34 cm)
- Length: 30" – 34" (76.2cm- 86.36cm)
- Height: 12" (30.48 cm)
- Weight: 61 lbs (27.66 kg)
- Turning Dia: zero
- Max Speed: 2.0 mph
- Power Source: 12VCD battery, NiMH
- Endurance: 360 – 480 min
- Tether: fiber optic cable (data,video, audio)
- Control: remote teleop
- Sensors: biological, chemical, radiological
- Payload: 125 lbs
- Manipulator: 5 DOF with 44 in reach (adds 45lbs/20.4kg to weight)

Radio TX: 900 MHz control, 1800 MHz video, 469 MHz audio
Radio RX: 900 MHz control, 1800 MHz video, 469 MHz audio

91

Matilda

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Matilda

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

92

Chaos

Autonomous Solutions.
www.autonomoussolutions.com
Omar Salas

Manufacturer's Specs:

- Width: 28" (70 cm)
- Length: 28" (71 cm)
- Height: 8" (20 cm)
- Weight: 120 lbs (55 kg)
- Turning Dia: 39" (100)
- Max Speed: TBD
- Power Source: Lithium battery
- Endurance: 240 min
- Tether: None
- Control: remote teleop
- Sensors: 2 Cams
- Payload: TBD
- Manipulator: None

Radio TX: 2400 MHz/1000 mW (Video) 900 MHZ/1000 mW (data)
Radio RX: 2400 MHz/1000 mW (Video) 900 MHZ/1000 mW (data)

Chaos

Autonomous Solutions.
www.autonomoussolutions.com
Omar Salas

Manufacturer's Specs:

- Width: 28" (70 cm)
- Length: 28" (71 cm)
- Height: 8" (20 cm)
- Weight: 120 lbs (55 kg)
- Turning Dia: 39" (100)
- Max Speed: TBD
- Power Source: Lithium battery
- Endurance: 240 min
- Tether: None
- Control: remote teleop
- Sensors: 2 Cams
- Payload: TBD
- Manipulator: None

Radio TX: 2400 MHz/1000 mW (Video) 900 MHZ/1000 mW (data)
Radio RX: 2400 MHz/1000 mW (Video) 900 MHZ/1000 mW (data)

93

Chaos

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Chaos

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

94

ATRV mini

Idaho National Lab
www.inl.gov/adaptiverobotics
208-526-8659 /Curtis Nielsen

Manufacturer's Specs:

- Width: 22" (55.8 cm)
- Length: 27" (68.6 cm)
- Height: 25" (63.5 cm)
- Weight: 125 lbs (56.7 kg)
- Turning Diam: 0 (turns on center off robot)
- Max Speed: 6.5 fps (2 mps)
- Power Source: battery
- Endurance: 30-45 min
- Tether: none
- Control: eyes-on, remote teleop, waypoints, go to landmarks, drive intent
- Sensors: color video, laser range scanner, ultrasonic sonar sensor.
- Payload: 35 lb (15.9 kg)
- Manipulator: none

Radio TX: 900 MHz (500 mW), 2400 MHz (500 mW)
Radio RX: 900 MHz (500 mW), 2400 MHz

ATRV mini

Idaho National Lab
www.inl.gov/adaptiverobotics
208-526-8659 /Curtis Nielsen

Manufacturer's Specs:

- Width: 22" (55.8 cm)
- Length: 27" (68.6 cm)
- Height: 25" (63.5 cm)
- Weight: 125 lbs (56.7 kg)
- Turning Diam: 0 (turns on center off robot)
- Max Speed: 6.5 fps (2 mps)
- Power Source: battery
- Endurance: 30-45 min
- Tether: none
- Control: eyes-on, remote teleop, waypoints, go to landmarks, drive intent
- Sensors: color video, laser range scanner, ultrasonic sonar sensor.
- Payload: 35 lb (15.9 kg)
- Manipulator: none

Radio TX: 900 MHz (500 mW), 2400 MHz (500 mW)
Radio RX: 900 MHz (500 mW), 2400 MHz

95

ATRV mini

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

ATRV mini

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

96

Modular Logistics Platform

Segway, Inc.
www.segway.com
Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 33" (84 cm)
- Length: 26.5" (67 cm)
- Height: xxx" (xxx cm)
- Weight: 120 lbs (55 kg)
- Turning Dia: 42" (107 cm)
- Max Speed: 12.5 mph (20 km/h) Power Source: Two lithium-ion battery packs
- Endurance: 12 miles (19 km) off pavement
- Tether: None
- Control: dynamically stabilized, ride onboard, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders, camera
- Payload: 260 lb (118 kg)
- Manipulator: None

Radio TX: 2400 MHz/XXXmW (Video) 2400 MHZ/xxx mW (data)

Modular Logistics Platform

Segway, Inc.
www.segway.com
Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 33" (84 cm)
- Length: 26.5" (67 cm)
- Height: xxx" (xxx cm)
- Weight: 120 lbs (55 kg)
- Turning Dia: 42" (107 cm)
- Max Speed: 12.5 mph (20 km/h) Power Source: Two lithium-ion battery packs
- Endurance: 12 miles (19 km) off pavement
- Tether: None
- Control: dynamically stabilized, ride onboard, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders, camera
- Payload: 260 lb (118 kg)
- Manipulator: None

Radio TX: 2400 MHz/XXXmW (Video) 2400 MHZ/xxx mW (data)

97

Modular Logistics Platform

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Modular Logistics Platform

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

98

Talon

Foster-Miller
www.foster-miller.com/lemming.htm
781-684-3960/Joanne Maxwell

Manufacturer's Specs:

- Width: 16" (40.64 cm)
- Length: 19" (48.26 cm)
- Height: 11"-52" (27.9 c m - (132 cm)
- Weight: 115 to 140 lb (52kg to 64 kg)
- Turning Dia: turns in place
- Max Speed: 0 to 5.2 mph (0-8.3 km/hr
- Power Source: Single Lithium-ion Battery or Dual Lead-Acid Battery Pack
- Endurance: 4.5 hr (7.2 km/hr)
- Tether: Optional 300 or 500 m buffered fiber optic cable
- Control: digital/analog, 500-800 m LOS High Gain antenna range to 1200m LOS
- Sensors: Chemsentry 150 C, ADP 2000, RAE System MultiRAE, Canberra AN-UDR-14, RayTek temp. probe, targeting laser
- Payload: 100 lb (45 kg)
- Manipulator: 30 in-lb of gripping strength, 6 in wide opening, manual 340 degree wrist, OCU controllable 360 degree rotating wrist (optional)

Radio TX: Data 2400MHz / Video 1700-1800MHz
Radio RX: Data 2400MHz / Video 1700-1800MHz

Talon

Foster-Miller
www.foster-miller.com/lemming.htm
781-684-3960/Joanne Maxwell

Manufacturer's Specs:

- Width: 16" (40.64 cm)
- Length: 19" (48.26 cm)
- Height: 11"-52" (27.9 c m - (132 cm)
- Weight: 115 to 140 lb (52kg to 64 kg)
- Turning Dia: turns in place
- Max Speed: 0 to 5.2 mph (0-8.3 km/hr
- Power Source: Single Lithium-ion Battery or Dual Lead-Acid Battery Pack
- Endurance: 4.5 hr (7.2 km/hr)
- Tether: Optional 300 or 500 m buffered fiber optic cable
- Control: digital/analog, 500-800 m LOS High Gain antenna range to 1200m LOS
- Sensors: Chemsentry 150 C, ADP 2000, RAE System MultiRAE, Canberra AN-UDR-14, RayTek temp. probe, targeting laser
- Payload: 100 lb (45 kg)
- Manipulator: 30 in-lb of gripping strength, 6 in wide opening, manual 340 degree wrist, OCU controllable 360 degree rotating wrist (optional)

Radio TX: Data 2400MHz / Video 1700-1800MHz
Radio RX: Data 2400MHz / Video 1700-1800MHz

99

Talon

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Talon

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

100

Talon-Hazmat

Foster-Miller
www.foster-miller.com/lemming.htm
Tim Everhard,/781-684-4225

Manufacturer's Specs:

- Width: 22.5 in (57.2 cm)
- Length: 34 in (86.4 cm)
- Height: 11 in (27.9 cm)
- Weight: 115 to 140 lb (52kg to 64 kg)
- Turning Dia: turns in place
- Max Speed: 7.6 fps (1.8mps)
- Power Source: Battery Pack
- Endurance: 4.5 hr (7.2 km/hr)
- Tether: none
- Control: remote teleop
- Sensors: chemical warfare agents (blood, nerve, blister), TIC, radiation
- Payload: 100 lb (45 kg)
- Manipulator: reach 52 in (1.3 m)

Radio TX: 1650-1900 MHz / 2000 mW (video), 148-174 MHz/ 600 mW (audio), 2.3-2.4 MHz / 5-500 mW (commands)

Talon-Hazmat

Foster-Miller
www.foster-miller.com/lemming.htm
Tim Everhard,/781-684-4225

Manufacturer's Specs:

- Width: 22.5 in (57.2 cm)
- Length: 34 in (86.4 cm)
- Height: 11 in (27.9 cm)
- Weight: 115 to 140 lb (52kg to 64 kg)
- Turning Dia: turns in place
- Max Speed: 7.6 fps (1.8mps)
- Power Source: Battery Pack
- Endurance: 4.5 hr (7.2 km/hr)
- Tether: none
- Control: remote teleop
- Sensors: chemical warfare agents (blood, nerve, blister), TIC, radiation
- Payload: 100 lb (45 kg)
- Manipulator: reach 52 in (1.3 m)

Radio TX: 1650-1900 MHz / 2000 mW (video), 148-174 MHz/ 600 mW (audio), 2.3-2.4 MHz / 5-500 mW (commands)

101

Talon-Hazmat

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Talon-Hazmat

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

102

Robotic Mobility Platform

(RMP 200/INL)

Segway, Inc.
www.segway.com/Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 29.5" (75 cm)
- Length: 25" 64 cm)
- Height: 24" (61 cm)
- Weight: 140 lbs (64 kg)
- Turning Dia: 39" (99 cm)
- Max Speed: 10 mph (16 km/h)
- Power Source: Two lithium-ion battery packs
- Endurance: 15 miles (24 km)
- Tether: None
- Control: dynamically stabilized, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders, camera, laser scanner for mapping
- Payload: 200 lb (91 kg)
- Manipulator: Barrett Technology WAM

Radio TX: 2400 MHz/XXXmW (Video) 900 MHZ/xxx mW (data)

Robotic Mobility Platform

(RMP 200/INL)

Segway, Inc.
www.segway.com/Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 29.5" (75 cm)
- Length: 25" 64 cm)
- Height: 24" (61 cm)
- Weight: 140 lbs (64 kg)
- Turning Dia: 39" (99 cm)
- Max Speed: 10 mph (16 km/h)
- Power Source: Two lithium-ion battery packs
- Endurance: 15 miles (24 km)
- Tether: None
- Control: dynamically stabilized, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders, camera, laser scanner for mapping
- Payload: 200 lb (91 kg)
- Manipulator: Barrett Technology WAM

Radio TX: 2400 MHz/XXXmW (Video) 900 MHZ/xxx mW (data)

103

Robotic Mobility Platform
(RMP 200/INL)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Robotic Mobility Platform
(RMP 200/INL)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

104

Mini-Andros II

REMOTEC, Inc.
www.remotec-andros.com
865-483-0228/Jim Daniels

Manufacturer's Specs:

- Width: 24.5" (62 cm)
- Length: 53" (134c m)
- Height: 27" (68 cm)
- Weight: 225 lbs (102.6 kg)
- Turning Dia: length of vehicle
- Max Speed: 1.1 mph(1.7 km/hr)
- Power Source: 24VDC - gel cell battery pack Battery
- Endurance: 3-6 hr
- Tether: Fiber-Optic Cable or hard tether cable
- Control: tethered,Radio Control
- Sensors: Color Camera
- Payload: 15 lbs (6.8 kg)
- Manipulator: 78" (2 m) telescoping arm with four degrees of freedom

Radio TX: tethered or RF
Radio RX: tethered or RF

Mini-Andros II

REMOTEC, Inc.
www.remotec-andros.com
865-483-0228/Jim Daniels

Manufacturer's Specs:

- Width: 24.5" (62 cm)
- Length: 53" (134 cm)
- Height: 27" (68 cm)
- Weight: 225 lbs (102.6 kg)
- Turning Dia: length of vehicle
- Max Speed: 1.1 mph(1.7 km/hr)
- Power Source: 24VDC - gel cell battery pack Battery
- Endurance: 3-6 hr
- Tether: Fiber-Optic Cable or hard tether cable
- Control: tethered,Radio Control
- Sensors: Color Camera
- Payload: 15 lbs (6.8 kg)
- Manipulator: 78" (2 m) telescoping arm with four degrees of freedom

Radio TX: tethered or RF
Radio RX: tethered or RF

Mini-Andros II

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Mini-Andros II

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

106

Robotic Mobility Platform

(RMP 400/INL)

Segway, Inc.

www.segway.com/Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 30" (76 cm)
- Length: 44" (112 cm)
- Height: 24" (61 cm)
- Weight: 240 lbs (109 kg)
- Turning Dia: 53" (135 cm)
- Max Speed: 18 mph (29 km/h)
- Power Source: Four lithium-ion battery packs
- Endurance: 15 miles (24 km)
- Tether: None
- Control: Statically stabilized, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders,
- Payload: 400 lb (180 kg)
- Manipulator: Barrett Technology WAM

Radio TX: 75 MHz/XXXmW (Video) 2400 MHZ/xxx mW (data)

Robotic Mobility Platform

(RMP 400/INL)

Segway, Inc.

www.segway.com/Will Pong/603-222-6000

Manufacturer's Specs:

- Width: 30" (76 cm)
- Length: 44" (112 cm)
- Height: 24" (61 cm)
- Weight: 240 lbs (109 kg)
- Turning Dia: 53" (135 cm)
- Max Speed: 18 mph (29 km/h)
- Power Source: Four lithium-ion battery packs
- Endurance: 15 miles (24 km)
- Tether: None
- Control: Statically stabilized, remote teleoperative or autonomous
- Sensors: gyros, wheel encoders,
- Payload: 400 lb (180 kg)
- Manipulator: Barrett Technology WAM

Radio TX: 75 MHz/XXXmW (Video) 2400 MHZ/xxx mW (data)

107

Robotic Mobility Platform
(RMP 400/INL)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Robotic Mobility Platform
(RMP 400/INL)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

108

Andros F6A

REMOTEC, Inc.
www.remotec-andros.com
865-483-0228/Jim Daniels

Manufacturer's Specs:

- Width: 29" (73 cm
- Length: 52" (132 cm)
- Height: 56.5" (140 cm)
- Weight: 485 lb (219.99kg)
- Turning Dia: within the length of vehicle
- Max Speed: 3.5 mph (5.6 km/hr)
- Power Source: 24VDC 35 amp-hr gel-cell battery pack
- Endurance: 3-6 hr
- Tether: Interchangeable Fiber Optic Cable reel, RF system, or Hard-line cable reel system
- Control: tethered or RF
- Sensors: Color camera with low-light
- Payload: 45 lbs (20.4 kg)
- Manipulator: Arm -Vertical reach 109" (2.76 m) with tracks down and arm fully extended, Horizontal reach 56" (1.42 m) from front of vehicle

Radio TX: tethered or RF
Radio RX: tethered or RF

Andros F6A

REMOTEC, Inc.
www.remotec-andros.com
865-483-0228/Jim Daniels

Manufacturer's Specs:

- Width: 29" (73 cm
- Length: 52" (132 cm)
- Height: 56.5" (140 cm)
- Weight: 485 lb (219.99kg)
- Turning Dia: within the length of vehicle
- Max Speed: 3.5 mph (5.6 km/hr)
- Power Source: 24VDC 35 amp-hr gel-cell battery pack
- Endurance: 3-6 hr
- Tether: Interchangeable Fiber Optic Cable reel, RF system, or Hard-line cable reel system
- Control: tethered or RF
- Sensors: Color camera with low-light
- Payload: 45 lbs (20.4 kg)
- Manipulator: Arm -Vertical reach 109" (2.76 m) with tracks down and arm fully extended, Horizontal reach 56" (1.42 m) from front of vehicle

Radio TX: tethered or RF
Radio RX: tethered or RF

109

Andros F6A

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

Andros F6A

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):
Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:
Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:
Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:
Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

110

teleMAX

tele*rob* GmbH

www.telerob.de

Manufacturer's Specs:

- Width: 15.75" (40 cm)
- Length: 31.5" - 63" (80 cm – 160 cm)
- Height: 29.53" (75 cm) (stowed)
- Weight: 175 lbs (79.4 kg)
- Turning Dia: 39.37" (100cm)
- Max Speed: tracks 2.16 mph (3.5 kmh), wheels 2.92 mph (4.7 kmh)
  Power Source: NiMh, 24V DC
- Endurance: 2 hours
- Tether: none, fiber with video and comms
- Control: eyes-on, remote teleop
- Sensors: optional chemical, radiation, gas, GPS
- Payload: 22 lbs (10kg)
- Manipulator: 7 DOFs, reach 92,52 in to 102,36" (235 cm to 260 cm)

Radio TX: Data 433-435MHz/500mW, Video 2300 MHz/3W
Radio RX:

teleMAX

tele*rob* GmbH

www.telerob.de

Manufacturer's Specs:

- Width: 15.75" (40 cm)
- Length: 31.5" - 63" (80 cm – 160 cm)
- Height: 29.53" (75 cm) (stowed)
- Weight: 175 lbs (79.4 kg)
- Turning Dia: 39.37" (100cm)
- Max Speed: tracks 2.16 mph (3.5 kmh), wheels 2.92 mph (4.7 kmh)
  Power Source: NiMh, 24V DC
- Endurance: 2 hours
- Tether: none, fiber with video and comms
- Control: eyes-on, remote teleop
- Sensors: optional chemical, radiation, gas, GPS
- Payload: 22 lbs (10kg)
- Manipulator: 7 DOFs, reach 92,52 in to 102,36" (235 cm to 260 cm)

Radio TX: Data 433-435MHz/500mW, Video 2300 MHz/3W
Radio RX:

111

teleMax

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

teleMax

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

112

BOZ I

BOZ Robotics
www.bozrobot.com
847-574-0168/Jamie Alvarez

Manufacturer's Specs:

- Width: 26.4 in (67 cm)
- Length: 67.3 in (171 cm)
- Height: 53.2 in (135 cm)
- Weight: 1,300 lbs (600 kg)
- Turning Dia: 360 degrees
- Max Speed: 6.7 km/h
- Power Source: battery
- Endurance: 3 - 4 hrs to continuous w/generator
- Tether: 100 meter; 1 km remote los
- Control: computer w/case and joystick
- Sensors: ultra sound distance sensors (to the cm) 5 cameras; 3 infrared
- Payload: 265 lb (120 kg) lifting capacity w/arm straight; 441 lbs (200 kg) arm bent
- Manipulator: Hydraulic gripper w/12,717 lbs (5,770 kg) of opening force, reach 11.5 ft (350 cm) and four joints independently operated to tear off car doors, trunks, & dexterity to pour a soda bottle in a glass

Radio TX: 2400 MHz
Radio RX: 2400 MHz

BOZ I

BOZ Robotics
www.bozrobot.com
847-574-0168/Jamie Alvarez

Manufacturer's Specs:

- Width: 26.4 in (67 cm)
- Length: 67.3 in (171 cm)
- Height: 53.2 in (135 cm)
- Weight: 1,300 lbs (600 kg)
- Turning Dia: 360 degrees
- Max Speed: 6.7 km/h
- Power Source: battery
- Endurance: 3 - 4 hrs to continuous w/generator
- Tether: 100 meter; 1 km remote los
- Control: computer w/case and joystick
- Sensors: ultra sound distance sensors (to the cm) 5 cameras; 3 infrared
- Payload: 265 lb (120 kg) lifting capacity w/arm straight; 441 lbs (200 kg) arm bent
- Manipulator: Hydraulic gripper w/12,717 lbs (5,770 kg) of opening force, reach 11.5 ft (350 cm) and four joints independently operated to tear off car doors, trunks, & dexterity to pour a soda bottle in a glass

Radio TX: 2400 MHz
Radio RX: 2400 MHz

113

BOZ I

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

BOZ I

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____ Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Confined Space

Minimum Height: _____ Time: _____
Pallets

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Ground Robots

Grasping Dexterity (shelves with objects):

	Top (Near)			Top (Mid)			Top (Far)			Time	Contacts
	Over	Under	Open	Over	Under	Open	Over	Under	Open		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:

Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Mobility/Endurance (single charge):

Terrain (flat): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (ramps): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)
Terrain (stepfields): # pallets, time (x hrs.), MTBF: (x hrs.), Field maint. (x min.)

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Random Maze:

Coverage: (x%), Time: (x min), Targets: (x of x)

Stairs:

Max. Degrees: 30 / 45 / 60: Time (Ascend: x min., Descend (Time: x min.)

Visual Acuity:

Ambient (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Dark (x lumens): Near: normal (x.x); zoom (x.x), Far: normal (x.x); zoom (x.x)
Var. illumination: (yes/no); Field of View (x deg); Pan (x deg); Tilt (x deg)

114

115

Wall Climbers

Wall Climbers

Wall Climbers

Wall Climbers

116

VMRP

Vortex HC LLC.
www.vortexhc.com
919-462-8828

Manufacturer's Specs:

- Width: 8.5" (21.5 cm)
- Length: 6.5" (16.5 cm)
- Height: 4" (10 cm)
- Weight: 1.87 lbs (.84kg)
- Turning Dia: TBD
- Max Speed: 6"/sec. (.154m/sec)
- Power Source: battery
- Endurance: 20- 40 minutes
- Tether: none
- Control: teleoped
- Sensors: 2 color camera (boom pan drive camera)
- Payload: 1 lbs (.45kg) (scalable)
- Manipulator: n/a

Radio TX: 2400 MHz (Bluetooth) video 1200 MHz
Radio RX: 2400 MHz (Bluetooth)

VMRP

Vortex HC LLC.
www.vortexhc.com
919-462-8828

Manufacturer's Specs:

- Width: 8.5" (21.5 cm)
- Length: 6.5" (16.5 cm)
- Height: 4" (10 cm)
- Weight: 1.87 lbs (.84kg)
- Turning Dia: TBD
- Max Speed: 6"/sec. (.154m/sec)
- Power Source: battery
- Endurance: 20- 40 minutes
- Tether: none
- Control: teleoped
- Sensors: 2 color camera (boom pan drive camera)
- Payload: 1 lbs (.45kg) (scalable)
- Manipulator: n/a

Radio TX: 2400 MHz (Bluetooth) video 1200 MHz
Radio RX: 2400 MHz (Bluetooth)

117

VMRP

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Wall Climbers

VMRP

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Wall Climbers

118

NanoMag

Inuktun
www.inuktun.com/
1-877-468-5886

Manufacturer's Specs:

- Width: 17 " (43.1cm)
- Length: 12" (30.4 cm)
- Height: 3.5" (8.8 cm)
- Weight: 5 lbs (2.26kg)
- Turning Dia: TBD
- Max Speed: 0-5 ft/min (0-1.5 m/min)
- Power Source: TBD
- Endurance: TBD
- Tether: 100ft (30m)
- Control: teleoped
- Sensors: TBD
- Payload: TBD
- Manipulator: n/a

Radio Tx: (tether only)
Radio Rx: (tether only)

NanoMag

Inuktun
www.inuktun.com/
1-877-468-5886

Manufacturer's Specs:

- Width: 17 " (43.1cm)
- Length: 12" (30.4 cm)
- Height: 3.5" (8.8 cm)
- Weight: 5 lbs (2.26kg)
- Turning Dia: TBD
- Max Speed: 0-5 ft/min (0-1.5 m/min)
- Power Source: TBD
- Endurance: TBD
- Tether: 100ft (30m)
- Control: teleoped
- Sensors: TBD
- Payload: TBD
- Manipulator: n/a

Radio Tx: (tether only)
Radio Rx: (tether only)

119

NanoMag

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Wall Climbers

NanoMag

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Incline Plane:
Max. Operating Angle: Grnd. (20, 30, 40, 50, 60, 70, 80), Wall: (90), Inverted: (100, 135, 180)

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Wall Climbers

120

121

Aerial Robots

Aerial Robots

Aerial Robots

Aerial Robots

122

Blimp

ARACAR
www.aracar.org/index.html
985-845-3774

Manufacturer's Specs:

- Length: 10' -20' (3 m-6 m)
- Weight: < 0! lbs (< 0! kg)
- Range: 150 ft (50 m) tethered
- Speed: 0 km/hr (or tether vehicle speed)
- Launch: vertical pay out of tether
- Recovery: vertical retrieval of tether
- Propulsion: none
- Altitude: 150 ft (50 m)
- Endurance: TBD
- Control: none
- Payload: small camera

Radio TX:
Radio RX:

Blimp

ARACAR
www.aracar.org/index.html
985-845-3774

Manufacturer's Specs:

- Length: 10' -20' (3 m-6 m)
- Weight: < 0! lbs (< 0! kg)
- Range: 150 ft (50 m) tethered
- Speed: 0 km/hr (or tether vehicle speed)
- Launch: vertical pay out of tether
- Recovery: vertical retrieval of tether
- Propulsion: none
- Altitude: 150 ft (50 m)
- Endurance: TBD
- Control: none
- Payload: small camera

Radio TX:
Radio RX:

123

Blimp

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Blimp

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

124

Nighthawk

Applied Research Associates, Inc
www.ara.com
Adam Sloan/asloan@ara.com

Manufacturer's Specs:

- Wingspan: 2.2 ft (0.66 m)
- Length: 1.7 ft (0.51 m)
- Weight: 1.65 lbs (0.750 kg)
- Range: 6.2 miles (10 km)
- Speed: 28 mph (44 kmph)
- Launch: hand
- Recovery: skid land
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 60-90 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:915-928 MHz / 650 mW/2409-2469 MHz / 600 mW
Radio RX:

Nighthawk

Applied Research Associates, Inc
www.ara.com
Adam Sloan/asloan@ara.com

Manufacturer's Specs:

- Wingspan: 2.2 ft (0.66 m)
- Length: 1.7 ft (0.51 m)
- Weight: 1.65 lbs (0.750 kg)
- Range: 6.2 miles (10 km)
- Speed: 28 mph (44 kmph)
- Launch: hand
- Recovery: skid land
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 60-90 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:915-928 MHz / 650 mW/2409-2469 MHz / 600 mW
Radio RX:

125

Nighthawk

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Nighthawk

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

126

TACMAV

Applied Research Associates

Manufacturer's Specs:

- Wingspan: 1.75 ft (0.53 m)
- Length: 1.65 ft (0.50 m)
- Weight: xx lbs (xx kg)
- Range: xx miles (xx km)
- Speed: 49.7 mph (80 km/hr)
  Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 25-50 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

TACMAV

Applied Research Associates

Manufacturer's Specs:

- Wingspan: 1.75 ft (0.53 m)
- Length: 1.65 ft (0.50 m)
- Weight: xx lbs (xx kg)
- Range: xx miles (xx km)
- Speed: 49.7 mph (80 km/hr)
  Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 25-50 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

127

TACMAV

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

TACMAV

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

128

AirRobot

AirRobot GmbH
www.AirRobot.com
49 2932 54 77 40/info@airrobot.de

Manufacturer's Specs:

- Rotor span: 36” (1097 cm)
- Length: 36” (1097 cm) diameter
- Weight: less than 2.2 lbs (less than 1 kg)
- Range: up to 1640 ft (up to 500 m)
- Speed: approximate 25 mph
- Launch: vertical
- Recovery: vertical
- Propulsion: electric, LiPo Battery 14.8 V, 2.05 Ah
- Altitude: up to 492 ft (150m)
- Endurance: 20-25 min
- Control: video glasses or Tablet PC
- Payload: 0.44 lb (0.2 kg)

Radio TX: 35 MHz (200 mW)
Radio RX: 35 MHz Video 1420 MHz

AirRobot

AirRobot GmbH
www.AirRobot.com
49 2932 54 77 40/info@airrobot.de

Manufacturer's Specs:

- Rotor span: 36” (1097 cm)
- Length: 36” (1097 cm) diameter
- Weight: less than 2.2 lbs (less than 1 kg)
- Range: up to 1640 ft (up to 500 m)
- Speed: approximate 25 mph
- Launch: vertical
- Recovery: vertical
- Propulsion: electric, LiPo Battery 14.8 V, 2.05 Ah
- Altitude: up to 492 ft (150m)
- Endurance: 20-25 min
- Control: video glasses or Tablet PC
- Payload: 0.44 lb (0.2 kg)

Radio TX: 35 MHz (200 mW)
Radio RX: 35 MHz

AirRobot

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

AirRobot

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

130

Dragon Eye

AeroVironment Inc.
www.avsuav.com
626-357-9983

Manufacturer's Specs:

- Wingspan: 3 ft (0.9 m)
- Length: 3 ft (0.9 m)
- Weight: 5.9 lbs (2.7kg)
- Range: 3.1 mile (5 km)
- Speed: 21.7 mph (35 km/hr
  Launch: bungee
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 45-60 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

Dragon Eye

AeroVironment Inc.
www.avsuav.com
626-357-9983

Manufacturer's Specs:

- Wingspan: 3 ft (0.9 m)
- Length: 3 ft (0.9 m)
- Weight: 5.9 lbs (2.7kg)
- Range: 3.1 mile (5 km)
- Speed: 21.7 mph (35 km/hr
  Launch: bungee
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 45-60 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

131

Dragon Eye

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Dragon Eye

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

132

Cyberbug

CyberDefense Systems
www.cyberdefensesystems.com/
Billy Robinson/727-577-0878

Manufacturer's Specs:

- Wingspan: 3.5 ft (1.1 m)
- Length: 3.5 ft (1.1 m)
- Weight: 7 lbs (3.2 kg)
- Range: 6.2 miles (10 km)
- Speed: 24.85 mph (40 km/hr)
- Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 45 min
- Control: auto waypoint following
  Payload: color camera, infrared

Radio TX: 900 MHz – 2400 MHz
Radio RX:

Cyberbug

CyberDefense Systems
www.cyberdefensesystems.com/
Billy Robinson/727-577-0878

Manufacturer's Specs:

- Wingspan: 3.5 ft (1.1 m)
- Length: 3.5 ft (1.1 m)
- Weight: 7 lbs (3.2 kg)
- Range: 6.2 miles (10 km)
- Speed: 24.85 mph (40 km/hr)
- Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 45 min
- Control: auto waypoint following
  Payload: color camera, infrared

Radio TX: 900 MHz – 2400 MHz
Radio RX:

CyberBug

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

CyberBug

Aerial Station Keeping (single charge):

Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools

Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____

Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:

LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:

Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)

Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

134

Raven

AeroVironment Inc.
www.avsuav.com
626-357-9983

Manufacturer's Specs:

- Wingspan: 4.5 ft (1.4 m)
- Length: 3 ft (0.9 m)
- Weight: 4.2 lbs (1.9 kg)
- Range: 6.2 miles (10 km)
- Speed: 20-50 mph (32-82 km/hr)
- Launch: hand
- Recovery: deep stall vertical
  Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 80-110 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

Raven

AeroVironment Inc.
www.avsuav.com
626-357-9983

Manufacturer's Specs:

- Wingspan: 4.5 ft (1.4 m)
- Length: 3 ft (0.9 m)
- Weight: 4.2 lbs (1.9 kg)
- Range: 6.2 miles (10 km)
- Speed: 20-50 mph (32-82 km/hr)
- Launch: hand
- Recovery: deep stall vertical
  Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 80-110 min
- Control: auto waypoint following
- Payload: color camera, infrared

Radio TX:
Radio RX:

135

Raven

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Raven

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

136

Evolution-XTS

BAI Aerosystems
Kirk Jenkins/ 410-820-8500

Manufacturer's Specs:

- Wingspan: 5.4 ft (1.6 m)
- Length: 3.2 ft (1.0 m)
- Weight: 8.2 lbs (3.7 kg)
- Range: 10000 m LOS
- Speed: 30-50mph (48-81 kmph)
- Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 90 min
- Control: auto waypoint following
- Payload: color camera, infrared bio/chemical

Radio TX: 399.37 MHz / 1500 mW
Radio RX:

Evolution-XTS

BAI Aerosystems
Kirk Jenkins/ 410-820-8500

Manufacturer's Specs:

- Wingspan: 5.4 ft (1.6 m)
- Length: 3.2 ft (1.0 m)
- Weight: 8.2 lbs (3.7 kg)
- Range: 10000 m LOS
- Speed: 30-50mph (48-81 kmph)
- Launch: hand
- Recovery: horizontal landing
- Propulsion: electric motor
- Altitude: 100-500 ft (30.48m-152.4m) AGL
- Endurance: 90 min
- Control: auto waypoint following
- Payload: color camera, infrared bio/chemical

Radio TX: 399.37 MHz / 1500 mW
Radio RX:

137

Evolution-XTS

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Evolution-XTS

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

138

Flying Bassett

University of Alabama in Huntsville (UAH)
Gary Maddux/gary.maddux@us.army.mil

Manufacturer's Specs:

- Rotor span: 6 ft (1.8 m)
- Length: 7 ft (2.13 m)
- Weight: 45 lbs (20.4 kg)
- Range: 0.5 mi (0.81km) LOS, Further with GCS
- Speed: 5 mph (8.1km/hr)
- Launch: vertical takeoff
- Recovery: vertical landing
- Propulsion: Zenoah 80cc 8 hp Twin ylinder, Gasoline
- Altitude: 500 ft (152 m)
- Endurance: 20 min
- Control: auto waypoint following
- Payload:

Radio TX: 72.230 MHz / 100 mW
Radio RX:

Flying Bassett
University of Alabama in Huntsville (UAH)
Gary Maddux/gary.maddux@us.army.mil

Manufacturer's Specs:

- Rotor span: 6 ft (1.8 m)
- Length: 7 ft (2.13 m)
- Weight: 45 lbs (20.4 kg)
- Range: 0.5 mi (0.81km) LOS, Further with GCS
- Speed: 5 mph (8.1km/hr)
- Launch: vertical takeoff
- Recovery: vertical landing
- Propulsion: Zenoah 80cc 8 hp Twin ylinder, Gasoline
- Altitude: 500 ft (152 m)
- Endurance: 20 min
- Control: auto waypoint following
- Payload:

Radio TX: 72.230 MHz / 100 mW
Radio RX:

139

Flying Bassett

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Flying Bassett

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

140

Yamaha Helicopter

SkeyesUnlimited Inc.
www.skeyesunlimited.com/index.html
412-661-0292

Manufacturer's Specs:

- Rotor span: 10.2 ft (3.1 m)
- Length: 11.8 ft (3.6 m)
- Weight: 207 lbs (94 kg)
- Range: 492 ft (150 m) LOS
- Speed: TBD
- Launch: vertical takeoff
- Recovery: vertical landing
- Propulsion: 21 hp, 246 cc, 2-stroke, gas/oil mix
- Altitude: TBD
- Endurance: 60 min
- Control: auto waypoint following
- Payload: 3-D laser scanner

Radio TX: TBD
Radio RX: TBD

Yamaha Helicopter

SkeyesUnlimited Inc.
www.skeyesunlimited.com/index.html
412-661-0292

Manufacturer's Specs:

- Rotor span: 10.2 ft (3.1 m)
- Length: 11.8 ft (3.6 m)
- Weight: 207 lbs (94 kg)
- Range: 492 ft (150 m) LOS
- Speed: TBD
- Launch: vertical takeoff
- Recovery: vertical landing
- Propulsion: 21 hp, 246 cc, 2-stroke, gas/oil mix
- Altitude: TBD
- Endurance: 60 min
- Control: auto waypoint following
- Payload: 3-D laser scanner

Radio TX: TBD
Radio RX: TBD

141

Yamaha Helicopter

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

Yamaha Helicopter

Aerial Station Keeping (single charge):
Targets: (flush: x of x), (recessed: x of x), Total: (y of y), Time: (x min.)

Cache packaging, weight, setup, tools
Packages: Ropacks _____ Pelicans _____ Hardiggs _____Pallets _____
Weights: Shipping _____ Deployed _____ Setup Time: X min. Tools: standard

Directed Perception (boxes with holes):

	Face			Top (Near)			Top (Far)			Time	Contacts
	Left	C	Right	Left	C	Right	Left	C	Right		
Level 4:	x	x	x	x	x	x	x	x	x	x min.	#
Level 3:	x	x	x	x	x	x	x	x	x	x min.	#
Level 2:	x	x	x	x	x	x	x	x	x	x min.	#
Level 1:	x	x	x	x	x	x	x	x	x	x min.	#

Radio Communications:
LOS: (x m, time, near field acuity), BLOS: (x m, time, near field acuity)

Visual Acuity:
Ambient (x lumens): near field (x.x), far field (x.x), zoom (x.x)
Dark (x lumens): near field (x.x), far field (x.x), zoom (x.x) – var. illumination: (yes/no)

Aerial Robots

142

143

Aquatic Robots

Aquatic Robots

Aquatic Robots

Aquatic Robots

144

VideoRay Pro 3

VideoRay
www.videoray.com/index.htm

Manufacturer's Specs:

- Width: 9" (22.5 cm)
- Length: 12" (30.5 cm)
- Height: 8.5" (21 cm)
- Weight: Submersible: 8.4 lbs (3.8 kg), Total System: 90 lbs
- Depth Rating 500 ft (152 m)
- Max Speed: 2.6 knots
- Power Source: Battery Pack
- Endurance: xx
- Tether: power, comms, 250 ft (75 m)
- Control: remote teleop
- Sensors: front/rear camera, scanning sonar (seasprite)
- Payload: xxx
- Manipulator: 10" (25 cm) gripper accessory

VideoRay Pro 3

VideoRay
www.videoray.com/index.htm

Manufacturer's Specs:

- Width: 9" (22.5 cm)
- Length: 12" (30.5 cm)
- Height: 8.5" (21 cm)
- Weight: Submersible: 8.4 lbs (3.8 kg), Total System: 90 lbs
- Depth Rating 500 ft (152 m)
- Max Speed: 2.6 knots
- Power Source: Battery Pack
- Endurance: xx
- Tether: power, comms, 250 ft (75 m)
- Control: remote teleop
- Sensors: front/rear camera, scanning sonar (seasprite)
- Payload: xxx
- Manipulator: 10" (25 cm) gripper accessory

145

146

Aquatic Robots

147

Sensors

Sensors

GammaRAE II Responder

RAE Systems, Inc
www.raesystems.com

- Width: 2.7 “(6.8 cm)
- Length: 4.9 “ (12.5 cm)
- Height: 1.4 “(3.5 cm)
- Weight: 0.625 lbs (0.24 kg)
- Sensitivity: (Cs-137, Co-60, Am-241)
- Energy range: 60 keV to 3.0 MeV
- Exposure rate range: 1 µR/h to 10 R/h
- Response with angle if incidence: ±20% from 0° for -45° to 45° (Cs-137)
- Type of detector: CsI(Tl)+photodiode & energy-compensated PIN diode
- Data transmission type: Bluetooth
- Battery type and lifetime: 2xAA alkaline, 500hr
- Display type: Backlit LCD
- Alarm type: Audible, Visual LEDs, Built-in vibration
- Control: Manual
- Radio frequency immunity:
- Radiated emission: omplies with FCC Part 15
- Shock resistance: Passes drop tests from 59” (1.5 m)

GammaRAE II Responder

RAE Systems, Inc
www.raesystems.com

- Width: 2.7 “(6.8 cm)
- Length: 4.9 “ (12.5 cm)
- Height: 1.4 “(3.5 cm)
- Weight: 0.625 lbs (0.24 kg)
- Sensitivity: (Cs-137, Co-60, Am-241)
- Energy range: 60 keV to 3.0 MeV
- Exposure rate range: 1 µR/h to 10 R/h
- Response with angle if incidence: ±20% from 0° for -45° to 45° (Cs-137)
- Type of detector: CsI(Tl)+photodiode & energy-compensated PIN diode
- Data transmission type: Bluetooth
- Battery type and lifetime: 2xAA alkaline, 500hr
- Display type: Backlit LCD
- Alarm type: Audible, Visual LEDs, Built-in vibration
- Control: Manual
- Radio frequency immunity:
- Radiated emission: omplies with FCC Part 15
- Shock resistance: Passes drop tests from 59” (1.5 m)

ICS-4000 Radionuclide Identifier

XRF Corporation
www.xrfcorp.com / www.laurussystems.com
410-465-5558

• Width:	3.4"
• Length:	10.2”
• Height:	1.2”
• Weight:	1.75 lbs
• Sensitivity:	Cs-137: 90 cps/mR/h, Co-60: 25 cps/mR/h, Am-241: 2900 cps/mR/h
• Energy range:	10 keV – 2 MeV
• Exposure rate range:	50 mR/h – 1 R/h
• Response with angle if incidence:	-3.3% 0° for -45° to 45° (Cs-137)
• Type of detector:	Solid state CdTe for dose rate & radionuclide ID
• Data transmission type:	Bluetooth
• Battery type and lifetime:	24 hours
• Display type:	LCD w LED backlight
• Alarm type:	Audible & visual
• Control:	Remote / manual
• Radio frequency immunity:	Class A per standard EN 61326 (1997) + A1 (1998) + A2 (2001)
• Radiated emission:	Class B per standard EN 61326 (1997) + A1 (1998) + A2 (2001)
• Shock resistance:	Conditional per ANSI N42.34

ICS-4000 Radionuclide Identifier

XRF Corporation
www.xrfcorp.com / www.laurussystems.com
410-465-5558

• Width:	3.4"
• Length:	10.2”
• Height:	1.2”
• Weight:	1.75 lbs
• Sensitivity:	Cs-137: 90 cps/mR/h, Co-60: 25 cps/mR/h, Am-241: 2900 cps/mR/h
• Energy range:	10 keV – 2 MeV
• Exposure rate range:	50 mR/h – 1 R/h
• Response with angle if incidence:	-3.3% 0° for -45° to 45° (Cs-137)
• Type of detector:	Solid state CdTe for dose rate & radionuclide ID
• Data transmission type:	Bluetooth
• Battery type and lifetime:	24 hours
• Display type:	LCD w LED backlight
• Alarm type:	Audible & visual
• Control:	Remote / manual
• Radio frequency immunity:	Class A per standard EN 61326 (1997) + A1 (1998) + A2 (2001)
• Radiated emission:	Class B per standard EN 61326 (1997) + A1 (1998) + A2 (2001)
• Shock resistance:	Conditional per ANSI N42.34

150

Sensors

Inspector-1000

Canberra Industries
www.canberra.com

- Width: 7.5 in (19 cm)
- Length: 6.5 in (16.5 cm)
- Height: 2.5 in (6.4 cm)
- Weight: 2.2 lbs (1.0 kg)
- Sensitivity: (Cs-137, Co-60, Am-241)
- Energy range: 50-3000 keV
- Exposure rate range: 1000 mR/h
- Response with angle if incidence: 95% from 0° for -45° to 45° (Cs-137)
- Type of detector: GM + (either NaI(Tl) or LaBr) with radionuclide ID
- Data transmission type: USB
- Battery type and lifetime: 12, hours
- Display type: LCD 320 x 200 Hi-res color display
- Alarm type: audible, visual
- Control: eyes-on, manual
- Radio frequency immunity: yes
- Radiated emission: yes
- Shock resistance: yes

Inspector-1000

Canberra Industries
www.canberra.com

- Width: 7.5 in (19 cm)
- Length: 6.5 in (16.5 cm)
- Height: 2.5 in (6.4 cm)
- Weight: 2.2 lbs (1.0 kg)
- Sensitivity: (Cs-137, Co-60, Am-241)
- Energy range: 50-3000 keV
- Exposure rate range: 1000 mR/h
- Response with angle if incidence: 95% from 0° for -45° to 45° (Cs-137)
- Type of detector: GM + (either NaI(Tl) or LaBr) with radionuclide ID
- Data transmission type: USB
- Battery type and lifetime: 12, hours
- Display type: LCD 320 x 200 Hi-res color display
- Alarm type: audible, visual
- Control: eyes-on, manual
- Radio frequency immunity: yes
- Radiated emission: yes
- Shock resistance: yes

151

Radiogem

Canberra Industries
www.canberra.com

• Width:	5.9 in (15.0 cm)
• Length:	3.3 in (8.5 cm)
• Height:	1.8 in (4.5 cm)
• Weight:	.66 lbs(0.300 kg)
• Sensitivity:	yes (Cs-137, Co-60, Am-241)
• Energy range:	30 - 2000 keV (probe dep.)
• Exposure rate range:	0.03-10,000mR/h
• Response with angle if incidence:	95% from 0° for -45° to 45° (Cs-137)
• Type of detector:	GM, or NaI, Plastic
• Data transmission type:	RS-232
• Battery type and lifetime:	80 hours
• Display type:	LCD display
• Alarm type:	audible, visual
• Control:	eyes-on, manual
• Radio frequency immunity:	yes
• Radiated emission:	yes
• Shock resistance:	yes

Radiogem

Canberra Industries
www.canberra.com

• Width:	5.9 in (15.0 cm)
• Length:	3.3 in (8.5 cm)
• Height:	1.8 in (4.5 cm)
• Weight:	.66 lbs(0.300 kg)
• Sensitivity:	yes (Cs-137, Co-60, Am-241)
• Energy range:	30 - 2000 keV (probe dep.)
• Exposure rate range:	0.03-10,000mR/h
• Response with angle if incidence:	95% from 0° for -45° to 45° (Cs-137)
• Type of detector:	GM, or NaI, Plastic
• Data transmission type:	RS-232
• Battery type and lifetime:	80 hours
• Display type:	LCD display
• Alarm type:	audible, visual
• Control:	eyes-on, manual
• Radio frequency immunity:	yes
• Radiated emission:	yes
• Shock resistance:	yes

152

Sensors

UltraRadiac

Canberra Industries
www.canberra.com

- Width: 2.61 in (6.6 cm)
- Length: 3.95 in (10.0 cm)
- Height: 1.14 in (2.9 cm)
- Weight: .6 lbs (0.269 kg)
- Sensitivity: yes (Cs-137, Co-60, Am-241)
- Energy range: 60 - 1300 keV
- Exposure rate range: 0.001 – 500,000 mR/h
- Response with angle if incidence: 45° to 45° (Cs- 95% from 0° for -137)
- Type of detector: GM
- Data transmission type: RS-232
- Battery type and lifetime: 150 hours
- Display type: LCD display
- Alarm type: audible, visual, vibration
- Control: yes-on, manual
- Radio frequency immunity: yes
- Radiated emission: yes
- Shock resistance: yes

UltraRadiac

Canberra Industries
www.canberra.com

- Width: 2.61 in (6.6 cm)
- Length: 3.95 in (10.0 cm)
- Height: 1.14 in (2.9 cm)
- Weight: .6 lbs (0.269 kg)
- Sensitivity: yes (Cs-137, Co-60, Am-241)
- Energy range: 60 - 1300 keV
- Exposure rate range: 0.001 – 500,000 mR/h
- Response with angle if incidence: 45° to 45° (Cs- 95% from 0° for -137)
- Type of detector: GM
- Data transmission type: RS-232
- Battery type and lifetime: 150 hours
- Display type: LCD display
- Alarm type: audible, visual, vibration
- Control: yes-on, manual
- Radio frequency immunity: yes
- Radiated emission: yes
- Shock resistance: yes

153

154

General Index

Contact Information		**ii**
Program Overview		**iii**
Events		
	2007-Disater City	1
	College Station, TX	
	2006-MD TF-1	5
	Rockville, MD	
	2006- Disaster City	9
	College Station, TX	
Safety		16
Test Methods		18
Ground Robots		52
Wall Climbers		116
Aerial Robots		122
Aquatic Robots		144
Sensors		148
Indexes		
	General	155
	Robots by Name	156
	Robots by Company	158
	Robots by Size	160
	Test Methods	162
	Sensors	163

General Index

Contact Information		**ii**
Program Overview		**iii**
Events		
	2007-Disater City	1
	College Station, TX	
	2006-MD TF-1	5
	Rockville, MD	
	2006- Disaster City	9
	College Station, TX	
Safety		16
Test Methods		18
Ground Robots		52
Wall Climbers		116
Aerial Robots		122
Aquatic Robots		144
Sensors		148
Indexes		
	General	155
	Robots by Name	156
	Robots by Company	158
	Robots by Size	160
	Test Methods	162
	Sensors	163

155

Index-Robot Name

Robot Name	Company	
Ground Robots		
Active Scope Camera	Tohoku University	59
Andros F6A	Remotec	109
ATRV mini	Idaho National Lab	95
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Boz I	BOZ Robotics	113
Chaos	Autonomous Solutions, Inc.	93
Cphea	Toin	87
Dragon Runner	Automatika	65
Eyeball	Remington Tech	53
Hero	First Response Robotics	75
Hibiscus	Toin	85
Iris	Toin	57
LRV	Applied Research Assoc.	61
Marv	Mesa Robotics	71
Matilda	Mesa Robotics	91
Mini-Andros II	Remotec	105
Modular Log. Platform	Segway	97
Neg Tact Surv Robot	Robotic FX	73
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
RMP 200	Segway	103
RMP 400	Segway	107
Shinobi	Univer. Electro Comm.	89

Index-Robot Name

Robot Name	Company	
Ground Robots		
Active Scope Camera	Tohoku University	59
Andros F6A	Remotec	109
ATRV mini	Idaho National Lab	95
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Boz I	BOZ Robotics	113
Chaos	Autonomous Solutions, Inc.	93
Cphea	Toin	87
Dragon Runner	Automatika	65
Eyeball	Remington Tech	53
Hero	First Response Robotics	75
Hibiscus	Toin	85
Iris	Toin	57
LRV	Applied Research Assoc.	61
Marv	Mesa Robotics	71
Matilda	Mesa Robotics	91
Mini-Andros II	Remotec	105
Modular Log. Platform	Segway	97
Neg Tact Surv Robot	Robotic FX	73
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
RMP 200	Segway	103
RMP 400	Segway	107
Shinobi	Univer. Electro Comm.	89

156

Index-Robot Name

Robot Name	Company	
Ground Robots Cont.		
Soryu	IRS	77
Soryu V	IRS	79
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
TeleMax	TeleRob	111
ToughBot	Omnitech Robotics	55
VGTV-Extreme	Inuktun	63
Wall Climbers		
NanoMag	Inuktun	119
VMRP	Vortex	117
Aerial Robots		
AirRobot	AirRobot	129
Blimp	ARACAR	123
CyberBug	Cyber Defense Systems, Inc.	133
Dragon Eye	AeroVironment, Inc.	131
Evolution-XTS	L-3 BAI Aerosystems, Inc.	137
Flying Bassett	Univ. of AL – Huntsville	139
Nighthawk	Applied Research Assoc.	125
Raven	AeroVironment, Inc.	135
Tacmav	Applied Research Assoc.	127
Yamaha Heliocoper	Skeyes Unlimited	141
Aquatic		
Pro III	VideoRay, LLC	145

Index-Robot Name

Robot Name	Company	
Ground Robots Cont.		
Soryu	IRS	77
Soryu V	IRS	79
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
TeleMax	TeleRob	111
ToughBot	Omnitech Robotics	55
VGTV-Extreme	Inuktun	63
Wall Climbers		
NanoMag	Inuktun	119
VMRP	Vortex	117
Aerial Robots		
AirRobot	AirRobot	129
Blimp	ARACAR	123
CyberBug	Cyber Defense Systems, Inc.	133
Dragon Eye	AeroVironment, Inc.	131
Evolution-XTS	L-3 BAI Aerosystems, Inc.	137
Flying Bassett	Univ. of AL – Huntsville	139
Nighthawk	Applied Research Assoc.	125
Raven	AeroVironment, Inc.	135
Tacmav	Applied Research Assoc.	127
Yamaha Heliocoper	Skeyes Unlimited	141
Aquatic		
Pro III	VideoRay, LLC	145

157

Index-Company

Robot Name	Company	
Ground Robots		
LRV	Applied Research Assoc.	61
Dragon Runner	Automatika	65
Chaos	Autonomous Solutions, Inc.	93
Boz I	BOZ Robotics	113
Hero	First Response Robotics	75
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
ATRV mini	Idaho National Lab	95
VGTV-Extreme	Inuktun	63
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Soryu	IRS	77
Soryu V	IRS	79
Marv	Mesa Robotics	71
Matilda	Mesa Robotics	91
ToughBot	Omnitech Robotics	55
Eyeball	Remington Tech	53
Andros F6A	Remotec	109
Mini-Andros II	Remotec	105
Neg Tact Surv Robot	Robotic FX	73
Modular Logistics Platform	Segway	97
RMP 200	Segway	103
RMP 400	Segway	107
TeleMax	TeleRob	111

Index-Company

Robot Name	Company	
Ground Robots		
LRV	Applied Research Assoc.	61
Dragon Runner	Automatika	65
Chaos	Autonomous Solutions, Inc.	93
Boz I	BOZ Robotics	113
Hero	First Response Robotics	75
Talon	Foster-Miller	99
Talon Hazmat	Foster-Miller	101
ATRV mini	Idaho National Lab	95
VGTV-Extreme	Inuktun	63
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Soryu	IRS	77
Soryu V	IRS	79
Marv	Mesa Robotics	71
Matilda	Mesa Robotics	91
ToughBot	Omnitech Robotics	55
Eyeball	Remington Tech	53
Andros F6A	Remotec	109
Mini-Andros II	Remotec	105
Neg Tact Surv Robot	Robotic FX	73
Modular Logistics Platform	Segway	97
RMP 200	Segway	103
RMP 400	Segway	107
TeleMax	TeleRob	111

158

Index-Company

Robot Name	Company	
Ground Robots Cont.		
Active Scope Camera	Tohoku University	59
Cphea	Toin	87
Hibiscus	Toin	85
Iris	Toin	57
Shinobi	Univer. Electro Comm.	89
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Wall Climbers		
NanoMag	Inuktun	119
VMRP	Vortex	117
Aerial Robots		
Dragon Eye	AeroVironment, Inc.	131
Raven	AeroVironment, Inc.	135
AirRobot	AirRobot	129
Nighthawk	Applied Research Assoc.	125
Tacmav	Applied Research Assoc.	127
Blimp	ARACAR	123
CyberBug	Cyber Defense Systems, Inc.	133
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Yamaha Helicopter	Skeyes Unlimited	141
Flying Bassett	Univ. of AL - Huntsville	139
Aquatic Robots		
Pro III	VideoRay, LLC	145

Index-Company

Robot Name	Company	
Ground Robots Cont.		
Active Scope Camera	Tohoku University	59
Cphea	Toin	87
Hibiscus	Toin	85
Iris	Toin	57
Shinobi	Univer. Electro Comm.	89
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Wall Climbers		
NanoMag	Inuktun	119
VMRP	Vortex	117
Aerial Robots		
Dragon Eye	AeroVironment, Inc.	131
Raven	AeroVironment, Inc.	135
AirRobot	AirRobot	129
Nighthawk	Applied Research Assoc.	125
Tacmav	Applied Research Assoc.	127
Blimp	ARACAR	123
CyberBug	Cyber Defense Systems, Inc.	133
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Yamaha Helicopter	Skeyes Unlimited	141
Flying Bassett	Univ. of AL - Huntsville	139
Aquatic Robots		
Pro III	VideoRay, LLC	145

159

Index-Size

Robot Name	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Iris	Toin	57
Active Scope Camera	Tohoku University	59
LRV	Applied Research Assoc.	61
VGTV-Exteme	Inuktun	63
Dragon Runner	Automatika	65
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Hero	First Response Robotics	75
Soryu	IRS	77
Soryu V	IRS	79
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Hibiscus	Toin	85
Cphea	Toin	87
Shinobi	Univer. Electro Comm.	89
Matilda	Mesa Robotics	91
Chaos	Autonomous Solutions, Inc.	93
ATRV mini	Idaho National Lab	95
Modular Logistics Platform	Segway	97
Talon	Foster-Miller	99

Index-Size

Robot Name	Company	
Ground Robots		
Eyeball	Remington Tech	53
ToughBot	Omnitech Robotics	55
Iris	Toin	57
Active Scope Camera	Tohoku University	59
LRV	Applied Research Assoc.	61
VGTV-Exteme	Inuktun	63
Dragon Runner	Automatika	65
BomBot	WVHTC	67
BomBot 2	WVHTC	69
Marv	Mesa Robotics	71
Neg Tact Surv Robot	Robotic FX	73
Hero	First Response Robotics	75
Soryu	IRS	77
Soryu V	IRS	79
PackBot EOD	iRobot	81
PackBot Explorer	iRobot	83
Hibiscus	Toin	85
Cphea	Toin	87
Shinobi	Univer. Electro Comm.	89
Matilda	Mesa Robotics	91
Chaos	Autonomous Solutions, Inc.	93
ATRV mini	Idaho National Lab	95
Modular Logistics Platform	Segway	97
Talon	Foster-Miller	99

160

Index-Size

Robot Name	Company	
Ground Robots Cont.		
Talon Hazmat	Foster-Miller	101
RMP 200	Segway	103
Mini-Andros II	Remotec	105
RMP 400	Segway	107
Andros F6A	Remotec	109
TeleMax	TeleRob	111
Boz I	BOZ Robotics	113
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
Nighthawk	Applied Research Assoc.	125
Tacmav	Applied Research Assoc.	127
AirRobot	AirRobot	129
Dragon Eye	AeroVironment, Inc.	131
CyberBug	Cyber Defense Systems, Inc.	133
Raven	AeroVironment, Inc.	135
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Flying Bassett	Univ. of AL - Huntsville	139
Yamaha Helicopter	Skeyes Unlimited	141
Aquatic Robots		
Pro III	VideoRay, LLC	145

Index-Size

Robot Name	Company	
Ground Robots Cont.		
Talon Hazmat	Foster-Miller	101
RMP 200	Segway	103
Mini-Andros II	Remotec	105
RMP 400	Segway	107
Andros F6A	Remotec	109
TeleMax	TeleRob	111
Boz I	BOZ Robotics	113
Wall Climbers		
VMRP	Vortex	117
NanoMag	Inuktun	119
Aerial Robots		
Blimp	ARACAR	123
Nighthawk	Applied Research Assoc.	125
Tacmav	Applied Research Assoc.	127
AirRobot	AirRobot	129
Dragon Eye	AeroVironment, Inc.	131
CyberBug	Cyber Defense Systems, Inc.	133
Raven	AeroVironment, Inc.	135
Evolution-XTS	L-3 BAI Aerosystems, Inc	137
Flying Bassett	Univ. of AL - Huntsville	139
Yamaha Helicopter	Skeyes Unlimited	141
Aquatic Robots		
Pro III	VideoRay, LLC	145

161

Index-Test Methods/Props

Test Methods **18**

Cache Packing 19

Confined Space 21

Directed Perception 23

Grasping Dexterity 25

Human Systems Interactions 27

Inclined Plane 29

Mobility/Endurance 31

Other Operational Features 33

Radio Communications 35

Random Maze 37

Stairs 39

Station Keeping 41

Step/Gap 43

Visual Acuity 45

Props

Repeatable Terrain 47

Targets and Objects 49

Index-Test Methods/Props

Test Methods **18**

Cache Packing 19

Confined Space 21

Directed Perception 23

Grasping Dexterity 25

Human Systems Interactions 27

Inclined Plane 29

Mobility/Endurance 31

Other Operational Features 33

Radio Communications 35

Random Maze 37

Stairs 39

Station Keeping 41

Step/Gap 43

Visual Acuity 45

Props

Repeatable Terrain 47

Targets and Objects 49

162

Index- Sensors

GammaRAE II Responder 149
ICS-4000 Radionuclide Identifier 150
Inspector-1000 151
Radiogem 152
UltraRadiac 153

Index- Sensors

GammaRAE II Responder 149
ICS-4000 Radionuclide Identifier 150
Inspector-1000 151
Radiogem 152
UltraRadiac 153

163